

LED Dock Light series

INSTRUCTION MANUAL

•Thank you for purchasing our product. Please read the below articles carefully to see how to use this product safely.

•Warning contents and attention contents related to product safely use, please be sure to follow it.

⚠ WARNING



Risk of Fire, Electrical Shock, Cuts or other Casualty Hazards-Installation and maintenance of this product must be performed by a qualified electrician. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and hazards involved.



Risk of Fire and Electric Shock-Make certain power is OFF before starting installation or attempting any maintenance. Disconnect power at fuse or circuit breaker.



Risk of Fire-Minimum 90°C supply conductors.
Risk of Burn-Disconnect power and allow fixture to cool before handling or servicing.
Risk of Personal Injury-Due to sharp edges, handle with care.




Failure to comply with these instructions may result in death, serious bodily injury and property damage.

Attention

- 1.This product within the input voltage range: 200-240V,50/60Hz.
- 2.If input voltage exceeds this range, it may cause the lamp failure. Please be sure to operate under correct input voltage.
- 3.Ensure ambient operating temperature of -35°C-55°C.
- 4.Using this product in temperatures outside of this range will reduce the product lifespan.
- 5.Make sure to turn off power before starting the installation process.
- 6.IP rating of Ip65, can work under damp/wet locations.
- 7.Please keep the product away from any corrosive substance. When you clean it, please use damp or dry cloth.


Wiring Diagram

AC IN

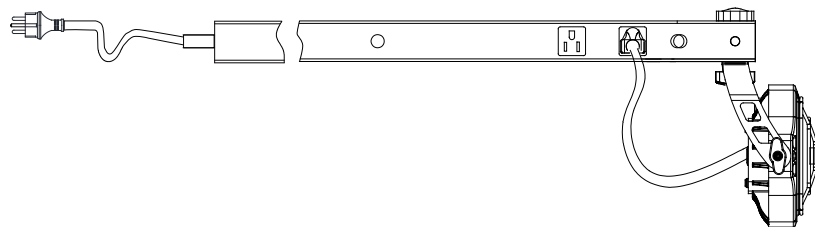


Product Dimension:

Bracke A1/A3




Bracke A2




	L1	L2	L3
Bracket A1	1007mm/39.65"	600mm/23.62"	450mm/17.72"
Bracket A2	1007mm/39.65"	600mm/23.62"	450mm/17.72"
Bracket A3	1507mm/59.33"	900mm/35.43"	650mm/25.59"

Bracke B1/B3




Bracke B2




	L1	L2	L3
Bracket B1	1067.5mm/42.02"	600mm/23.62"	450mm/17.72"
Bracket B2	1067.5mm/42.02"	600mm/23.62"	450mm/17.72"
Bracket B3	1567.5mm/61.71"	900mm/35.43"	650mm/25.59"

Bracke C1/C3



Bracke C2



	L1	L2	L3
Bracket C1	1067.5mm/42.02"	600mm/23.62"	450mm/17.72"
Bracket C2	1067.5mm/42.02"	600mm/23.62"	450mm/17.72"
Bracket C3	1567.5mm/61.71"	900mm/35.43"	650mm/25.59"


Installation

1. Installation accessories


1) 3 kinds of optional screws types (sale separately)





2) 3 kinds of optional wall mounting plates

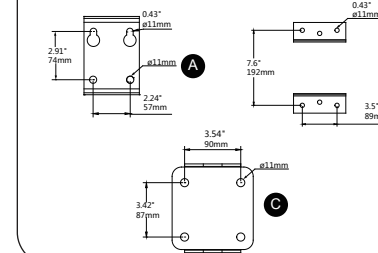

2. Drill holes in the wall according to the size of wall mounting plate



3. Fix the bracket with screws on the wall



4. Install the lamp body on the bracket

