

Light Measurement Report

Print date: 12-5-2025

Measurement date and time: 12-5-2025 13:13:16 – Measurement no. VFR-250512-1189-MS

Measurement tracking No. and Link: [VT250512-004391](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location

Goniospectrometer System and Type

Sensor Name, Calibr. Date and Serial No.

Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark

LabSpion – Type C, horizontal

LabSensor Model2 – 11-1-2024 – 3130191315

Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution

γ (gamma)-Resolution

Test Distance

Input Power, Power and Displ. Factors

Input RMS Voltage and Current

Frequency of Input Power

Warm-up Time and Variation

72 planes – 5°

5°

2,00 m

31,3 W – PF 0,95 – DPF 0,96

230 V – 0,142 A

50 Hz

Lamp stabilized in 15 min 2 sec – 2,0%

Tested Light Source

Product Name

Item No. and Manufacturer

Product Description (line 1)

806767-4000K-30W

806767-4000K-30W – Dutchfulfillment

3-FASE RAILSPOT | ZOOMABLE | WATT SWITCH | CCT-SWITCH | WIT

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)

Efficiency

Peak Intensity and Beam Angle

Correlated Color Temperature, Target/Measured

Color Rendering Index

Color Rendering TM30-18

Color Shift, CIE duv and MacAdam Steps

Flicker

1645 lm – 0,04% / 99,96%

53 lm/W

6377 cd – 27,8°



CCT = 4000 K / 4242 K

CRI 93,6

R_f 90,9 – R_g 99,5

Duv -0,0020 – SDCM 5,4

SVM 0 – PstLM 0,06

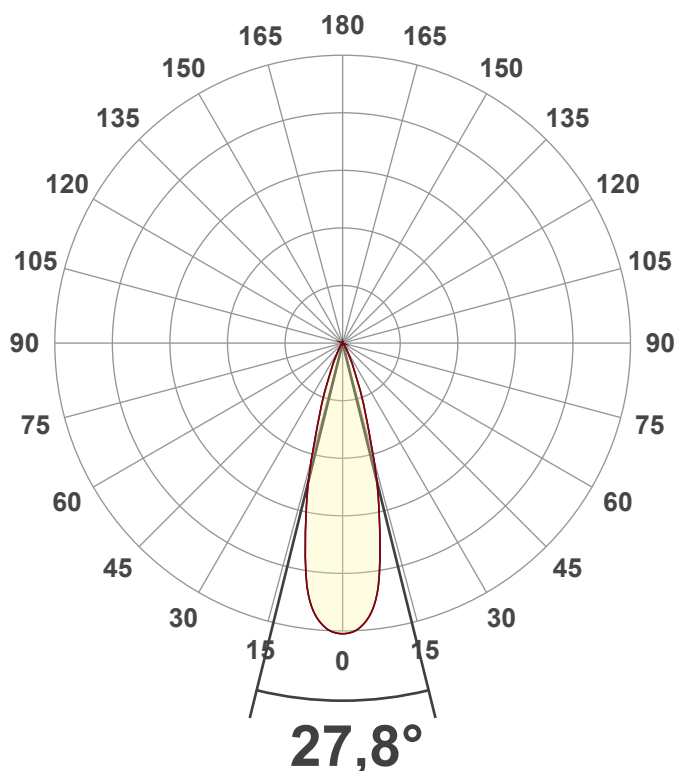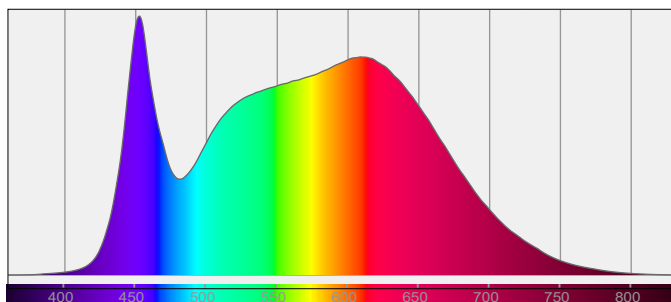

Light Measurement Report

Print date: 12-5-2025

Measurement date and time: 12-5-2025 13:13:16 – Measurement no. VFR-250512-1189-MS


Measurement tracking No. and Link: [VT250512-004391](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

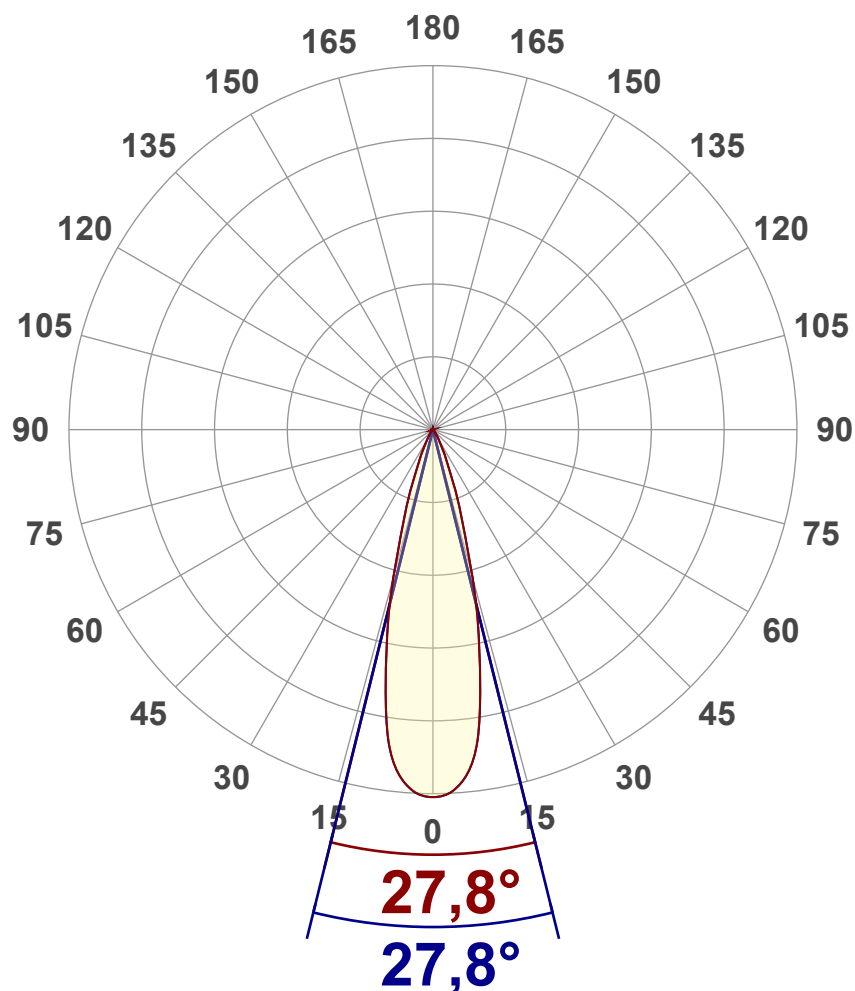

Main Values

Output (total Lumen)	1645 lm
Lumen Up% / Down%	0,04% / 99,96%
Peak Intensity	6377 cd
Beam Angle (50%)	27,8°
Beam Angle (90%)	27,8°
Beam Angle (10%)	27,8°

Cut-off Angle

Average 2,5%	63,7°
--------------	-------

Field Angle

Average 10%	46,5°
-------------	-------


Intensity Ratio

In 120° cone	99,6%
In 90° cone	98,0%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

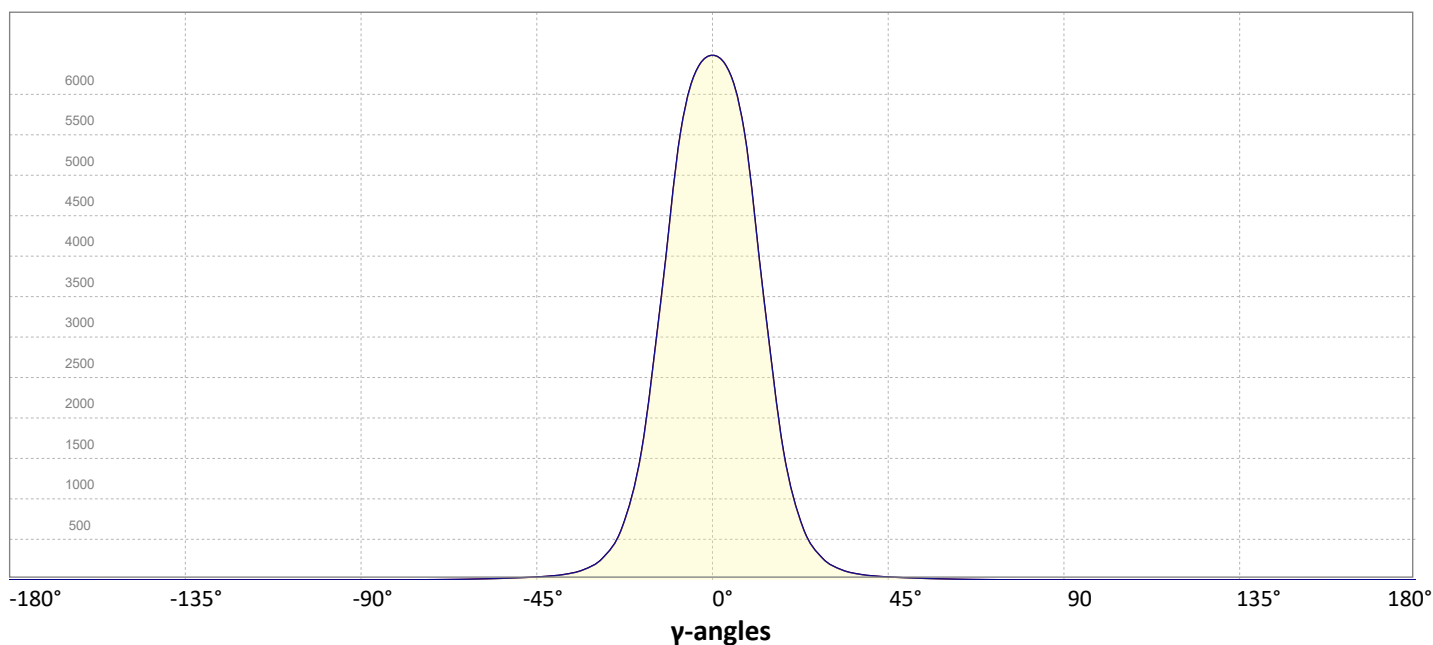


Light Measurement Report


Print date: 12-5-2025
Measurement date and time: 12-5-2025 13:13:16 – Measurement no. VFR-250512-1189-MS
Measurement tracking No. and Link: [VT250512-004391](#)
Operator:



Iso-intensity Diagram (Iso-candela)

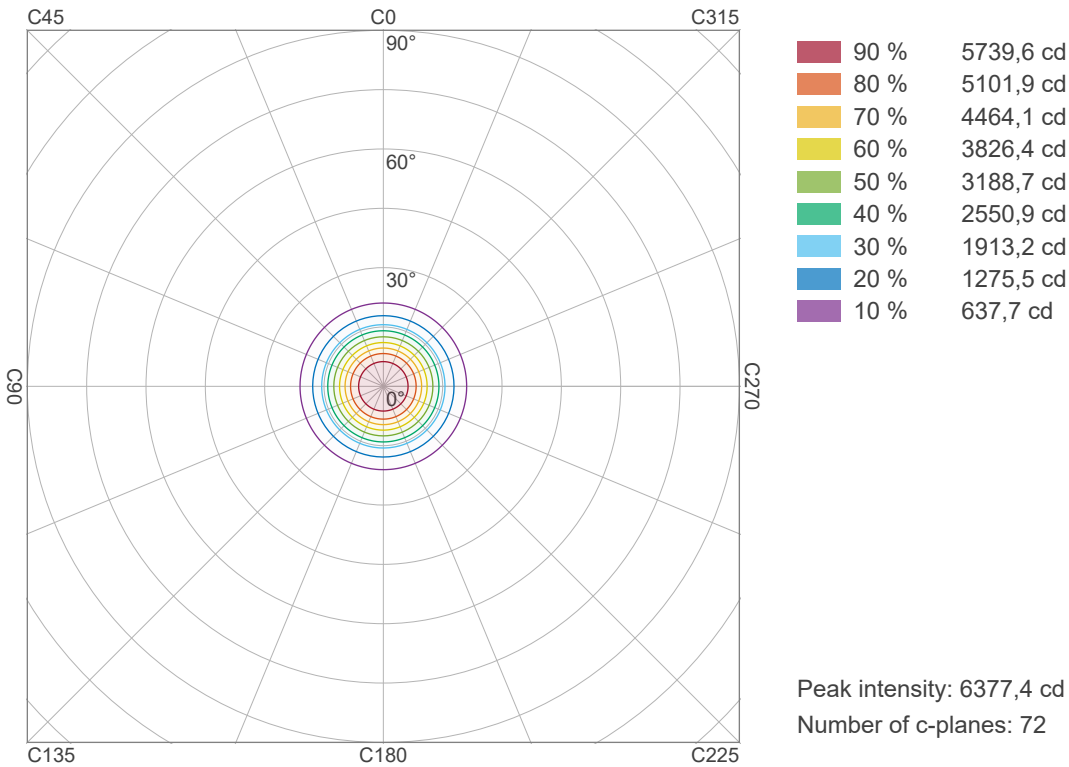

Iso-illuminance Diagram (Iso-lux)

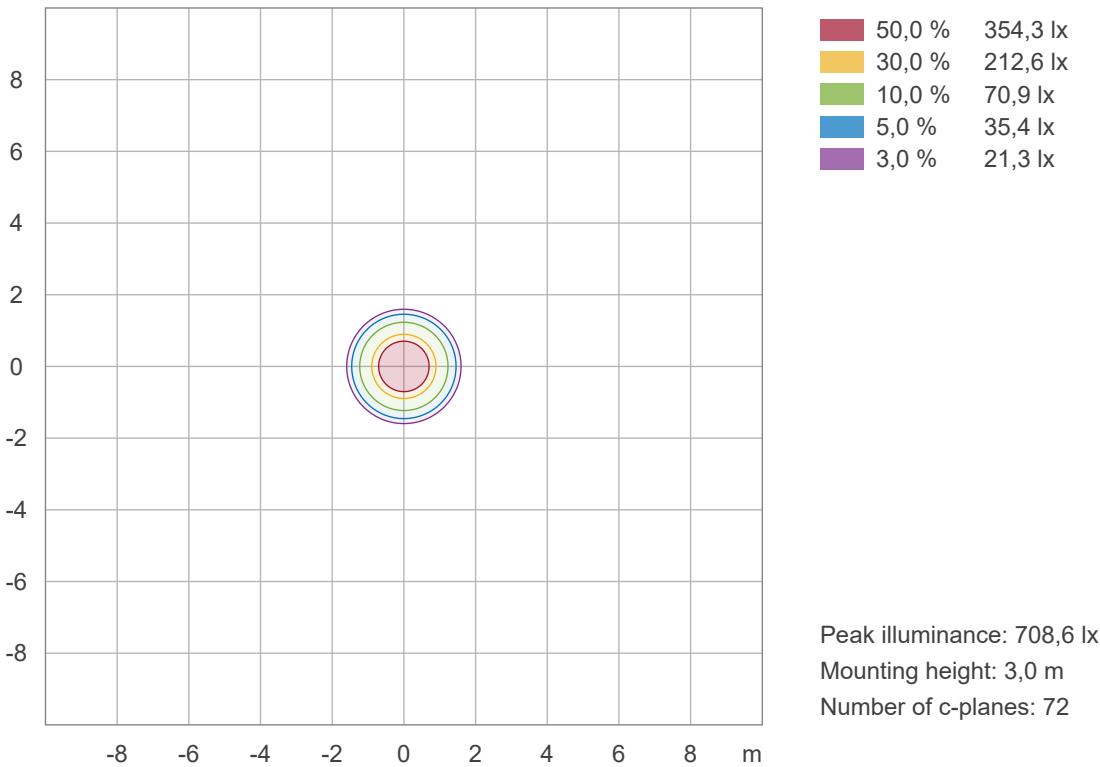

Light Measurement Report

Print date: 12-5-2025

Measurement date and time: 12-5-2025 13:13:16 – Measurement no. VFR-250512-1189-MS

Measurement tracking No. and Link: [VT250512-004391](#)

Operator:




Color details


Correlated Color Temperature, Target CCT = 4000 K
Correlated Color Temperature, Measured CCT = 4242 K
Color Rendering Index CRI 93,6
Color Rendering Index, R9 (red component) R9 = 67,6
Color Rendering TM30-18 R_f 90,9 – R_g 99,5
Color Quality Scale CQS = 91,4

MacAdam Steps
Color coordinates CIE 1931 (x;y) = (0,381;0,377)
Color coordinate CIEs 1960 (u;v) = (0,225;0,334)
Color deviation from BBL Duv = -0,0020
Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,225;0,502)


CIE 1931

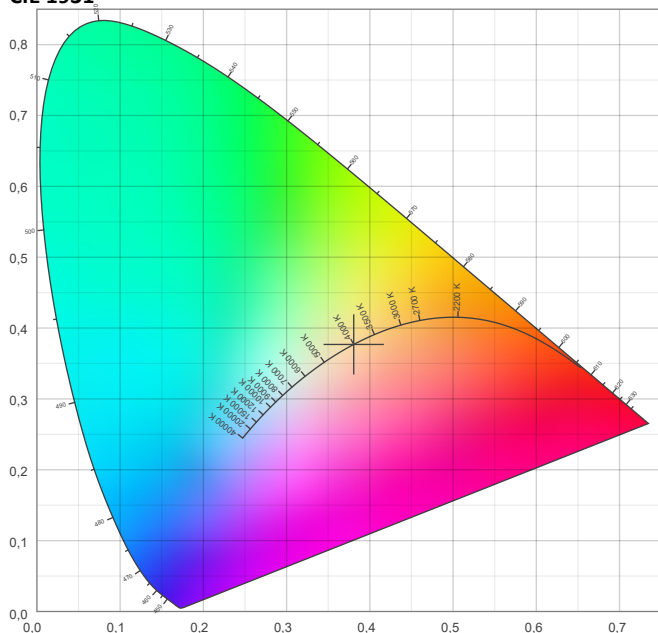

CIE 1931 – zoomed on Planckian locus

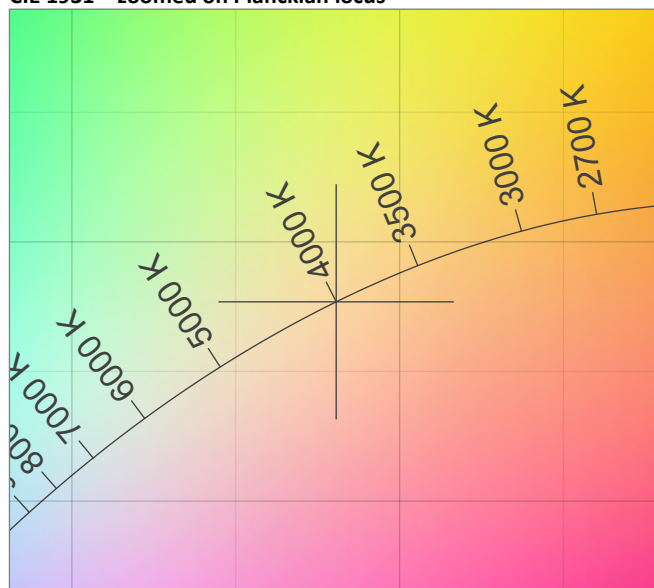


Color Rendering Index per reference color (CIE 1995)

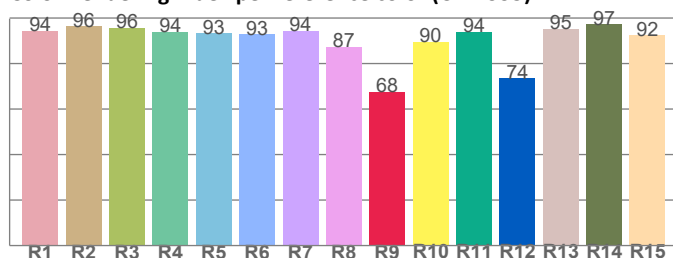


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94,4	96,3	95,8	94,0	93,4	92,8	94,4	87,4	67,6	89,5	93,9	73,6	95,3	97,3	92,4

Spectral power distribution (SPD) / W/nm – 0-100%

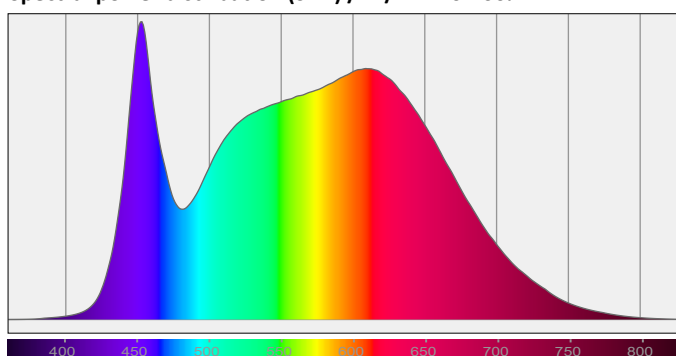


TM30-18 R_f-values per hue bin

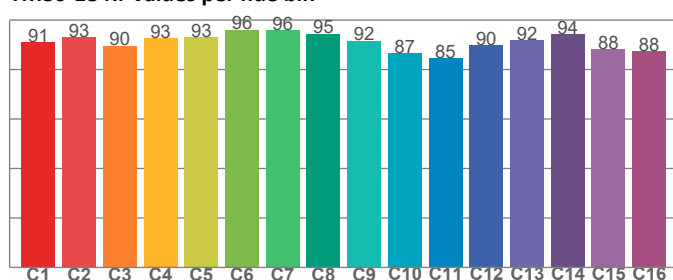

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91,1	93,0	89,7	92,6	93,0	96,1	95,9	94,5	91,6	86,6	84,5	89,7	91,7	94,2	88,2	87,5

Color Quality Scale by reference color

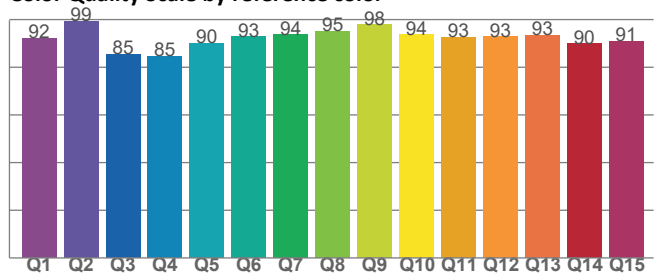

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92,3	99,2	85,5	84,7	90,0	92,9	93,6	95,2	97,8	93,6	92,6	92,9	93,5	89,9	90,8

Light Measurement Report

Print date: 12-5-2025


Measurement date and time: 12-5-2025 13:13:16 – Measurement no. VFR-250512-1189-MS

Measurement tracking No. and Link: [VT250512-004391](#)

Operator:



Beam Details

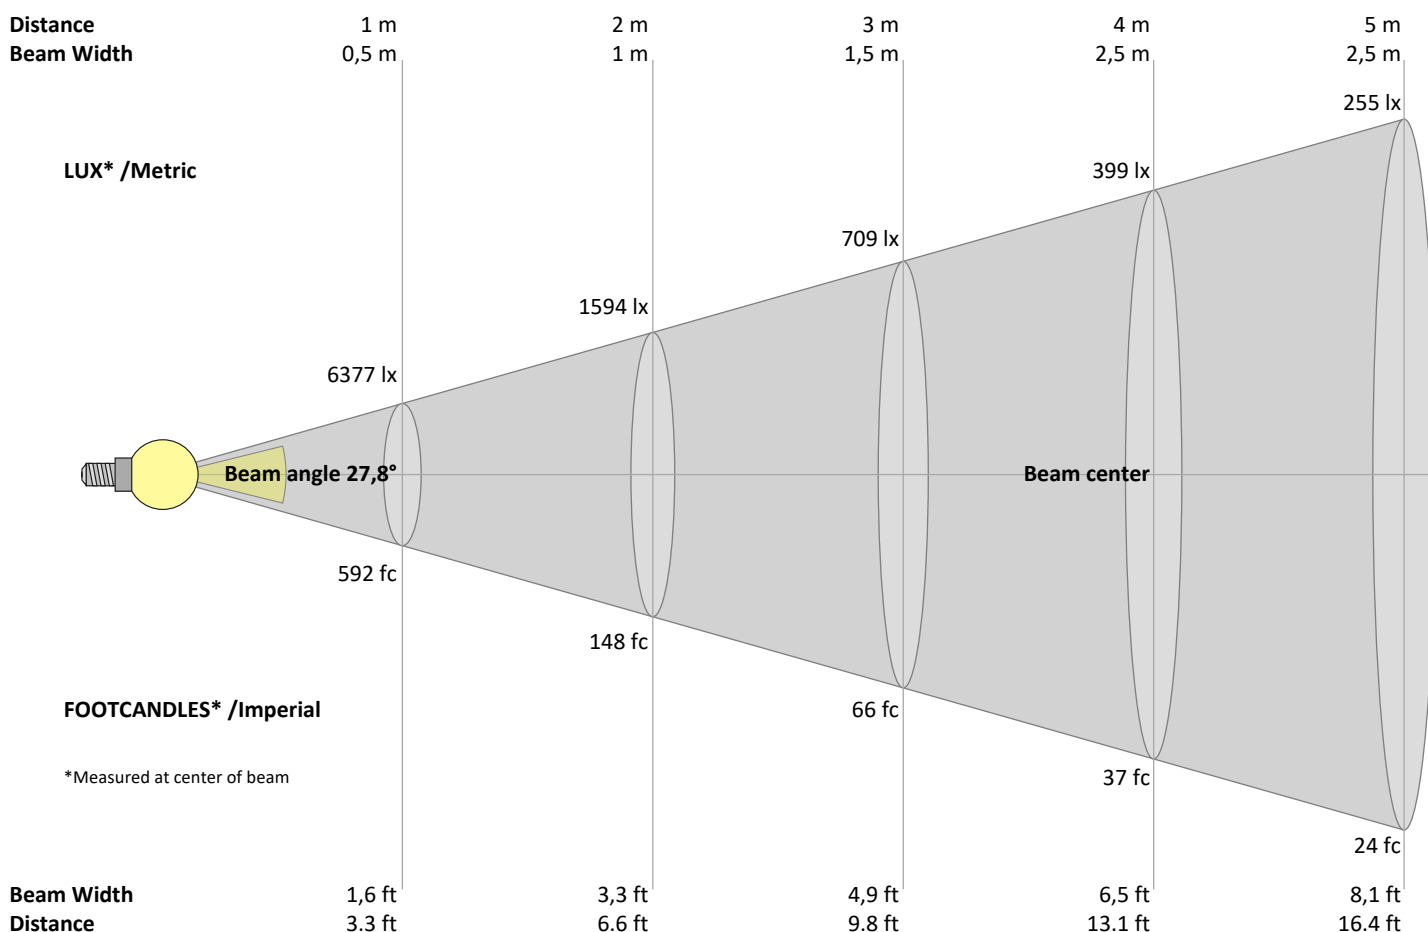

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
6377	1594	709	399	255	177	130	100	79	64	53	44	38	33	28	25	22	20	18	16	lux
592,5	148,1	65,8	37	23,7	16,5	12,1	9,3	7,3	5,9	4,9	4,1	3,5	3	2,6	2,3	2,1	1,8	1,6	1,5	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6377	6377	6238	5900	5562	4776	3950	3156	2406	1657	1246	866	581	430	279	213	155	112	89	66	cd
100%	100%	98%	93%	87%	75%	62%	49%	38%	26%	20%	14%	9%	7%	4%	3%	2%	2%	1%	1%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6377	6377	6238	5900	5562	4776	3950	3156	2406	1657	1246	866	581	430	279	213	155	112	89	66	cd
100%	100%	98%	93%	87%	75%	62%	49%	38%	26%	20%	14%	9%	7%	4%	3%	2%	2%	1%	1%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6377	6377	6238	5900	5562	4776	3950	3156	2406	1657	1246	866	581	430	279	213	155	112	89	66	cd
100%	100%	98%	93%	87%	75%	62%	49%	38%	26%	20%	14%	9%	7%	4%	3%	2%	2%	1%	1%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6377	6377	6238	5900	5562	4776	3950	3156	2406	1657	1246	866	581	430	279	213	155	112	89	66	cd
100%	100%	98%	93%	87%	75%	62%	49%	38%	26%	20%	14%	9%	7%	4%	3%	2%	2%	1%	1%	of 0°val

Light Measurement Report

Print date: 12-5-2025

Measurement date and time: 12-5-2025 13:13:16 – Measurement no. VFR-250512-1189-MS

Measurement tracking No. and Link: [VT250512-004391](#)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances											
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	15,0	15,4	15,0	15,6	15,8	15,0	15,4	15,0	15,6	15,8
	3H	14,8	15,4	15,1	15,6	15,7	14,8	15,4	15,1	15,6	15,7
	4H	14,7	15,3	15,1	15,5	15,7	14,7	15,3	15,1	15,5	15,7
	6H	14,7	15,2	15,0	15,5	15,8	14,7	15,2	15,0	15,5	15,8
	8H	14,7	15,1	15,0	15,4	15,8	14,7	15,1	15,0	15,4	15,8
	12H	14,6	15,0	15,0	15,4	15,8	14,6	15,0	15,0	15,4	15,8
4H	2H	14,7	15,3	15,1	15,5	15,8	14,7	15,3	15,1	15,5	15,8
	3H	14,8	15,2	15,1	15,6	16,0	14,8	15,2	15,1	15,6	16,0
	4H	14,7	15,1	15,1	15,5	16,0	14,7	15,1	15,1	15,5	16,0
	6H	14,6	15,1	15,1	15,4	15,7	14,6	15,1	15,1	15,4	15,7
	8H	14,5	15,0	15,0	15,3	15,6	14,5	15,0	15,0	15,3	15,6
	12H	14,5	14,8	15,0	15,2	15,6	14,5	14,8	15,0	15,2	15,6
8H	4H	14,5	15,0	15,0	15,3	15,7	14,5	15,0	15,0	15,3	15,7
	6H	14,5	14,7	15,0	15,2	15,7	14,5	14,7	15,0	15,2	15,7
	8H	14,5	14,7	15,0	15,2	15,8	14,5	14,7	15,0	15,2	15,8
	12H	14,4	14,6	15,0	15,1	15,7	14,4	14,6	15,0	15,1	15,7
12H	4H	14,5	14,8	15,0	15,2	15,7	14,5	14,8	15,0	15,2	15,7
	6H	14,5	14,7	15,0	15,2	15,8	14,5	14,7	15,0	15,2	15,8
	8H	14,4	14,6	15,0	15,1	15,7	14,4	14,6	15,0	15,1	15,7
Variations with the observer position for the luminaire spacings, S:											
S = 1.0H		3,9 / -3,4					3,9 / -3,4				
S = 1.5H		6,2 / -5,9					6,2 / -5,9				
S = 2.0H		8,1 / -8,4					8,1 / -8,4				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR		(RCR: Room Cavity Ratio)			Room Values are expressed as percentage of Lumen delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	107	104	102	109	106	103	100	102	100	98	100	98	96	97	95	94	93
3	107	102	99	96	105	101	98	95	99	96	94	96	94	92	94	92	91	89
4	104	98	94	91	102	97	93	91	95	92	90	93	91	89	92	89	88	86
5	101	95	90	87	99	94	90	87	92	89	86	91	88	85	89	87	85	83
6	98	91	87	84	96	90	86	83	89	86	83	88	85	82	87	84	82	81
7	95	88	84	81	94	87	83	81	86	83	80	85	82	80	84	82	79	78
8	92	85	81	78	91	85	81	78	84	80	78	83	80	77	82	79	77	76
9	90	83	79	76	89	82	78	76	81	78	75	81	77	75	80	77	75	74
10	87	80	76	73	86	80	76	73	79	76	73	79	75	73	78	75	73	72

Light Measurement Report


Print date: 12-5-2025
Measurement date and time: 12-5-2025 13:13:16 – Measurement no. VFR-250512-1189-MS
Measurement tracking No. and Link: [VT250512-004391](#)
Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

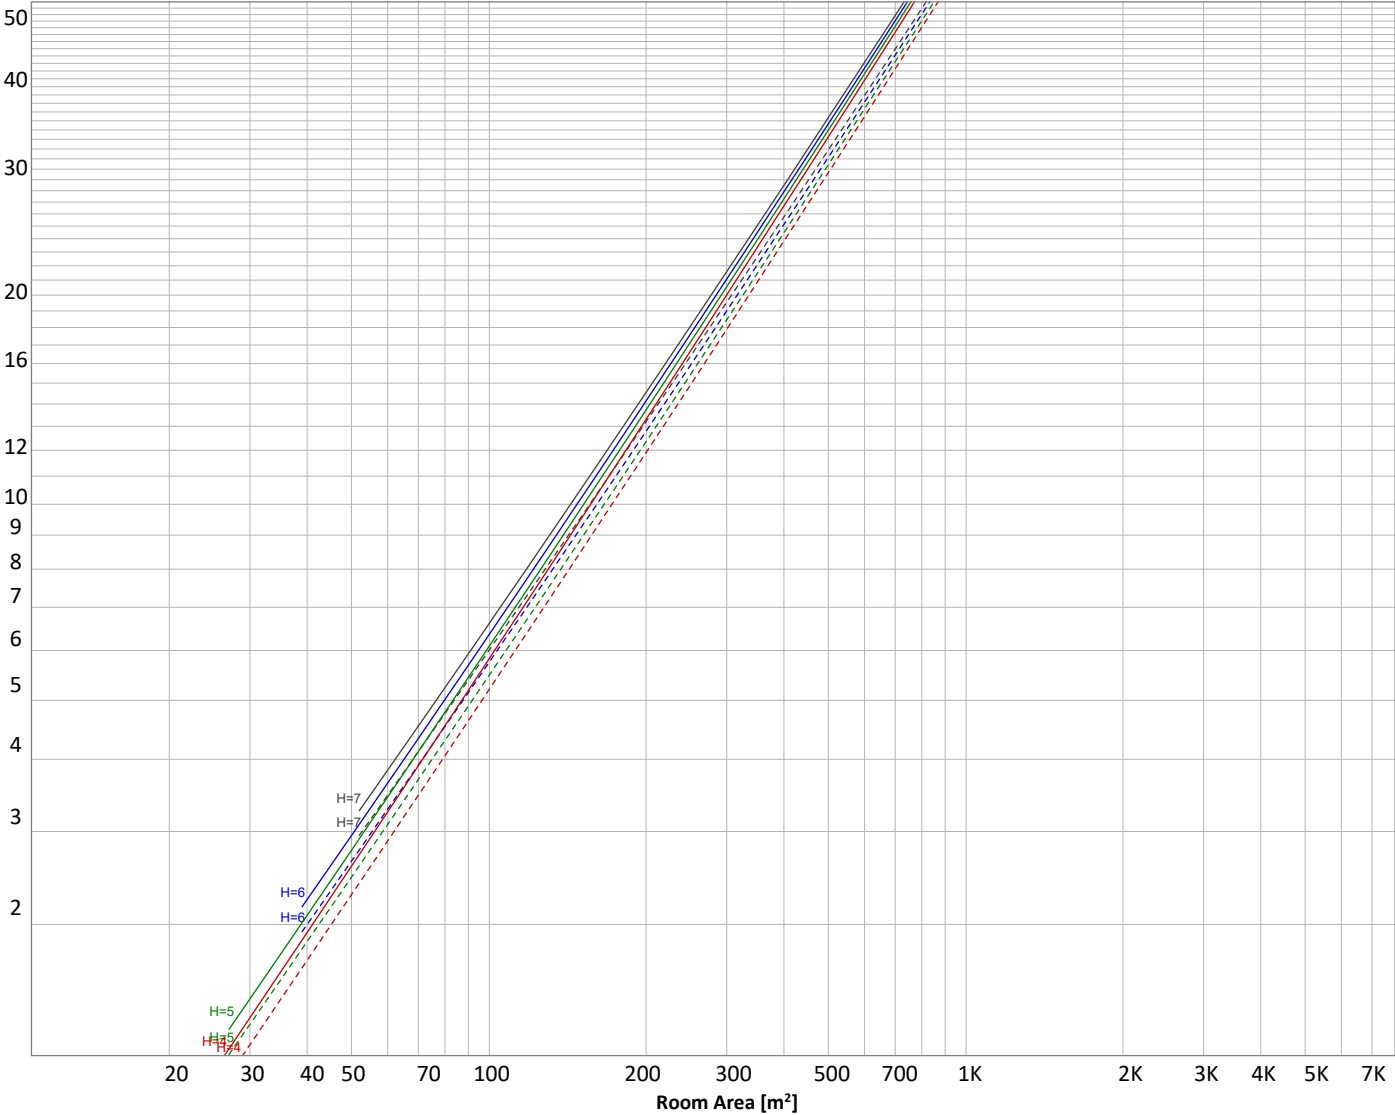

Conditions

H = Room height	Flux = 1645 lm	p(%)		
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50
E _{work} = Average lux on work area =	100 lx	-----	50	30
				Floor reflectance
				20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
554 lm	738 lm	239 lm	65,1 lm	28,0 lm	14,3 lm	5,35 lm	1,03 lm	0,017 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,000 lm	0,002 lm	0,000 lm	0,000 lm	0,001 lm	0,028 lm	0,220 lm	0,316 lm	0,093 lm

Light Measurement Report

Print date: 12-5-2025

Measurement date and time: 12-5-2025 13:13:16 – Measurement no. VFR-250512-1189-MS

Measurement tracking No. and Link: [VT250512-004391](#)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	554 lm	33,7%
10-20°	738 lm	44,8%
20-30°	239 lm	14,5%
30-40°	65 lm	4,0%
40-50°	28 lm	1,7%
50-60°	14 lm	0,9%
60-70°	5 lm	0,3%
70-80°	1 lm	0,1%
80-90°	0 lm	0,0%
90-100°	0 lm	0,0%
100-110°	0 lm	0,0%
110-120°	0 lm	0,0%
120-130°	0 lm	0,0%
130-140°	0 lm	0,0%
140-150°	0 lm	0,0%
150-160°	0 lm	0,0%
160-170°	0 lm	0,0%
170-180°	0 lm	0,0%
Total	1645 lm	100,0%

Intensity peaks

Max intensity	6377 cd
Intensity, 90°	0 cd
Intensity, 0°	6377 cd

Zonal Lumen summary

Zone (γ)	Lumen	% Total
0-30°	1530 lm	93,0%
0-40°	1595 lm	97,0%
0-60°	1638 lm	99,6%
60-90°	6 lm	0,4%
70-100°	1 lm	0,1%
90-120°	0 lm	0,0%
0-90°	1644 lm	100,0%
90-180°	1 lm	0,0%
0-180°	1645 lm	100,0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	764 lm	46,5%
Medium(30-60°)	55 lm	3,3%
High(60-80°)	3 lm	0,2%
Very high(80-90°)	0 lm	0,0%
Back light		
Low(0-30°)	764 lm	46,5%
Medium(30-60°)	55 lm	3,3%
High(60-80°)	3 lm	0,2%
Very high(80-90°)	0 lm	0,0%


Uplight

Low(90-100°)	0 lm	0,0%
High(100-180°)	1 lm	0,0%

IESNA TM-15-07

Luminaire Classification System For Outdoor Luminaires

BUG rating B2 U1 G0

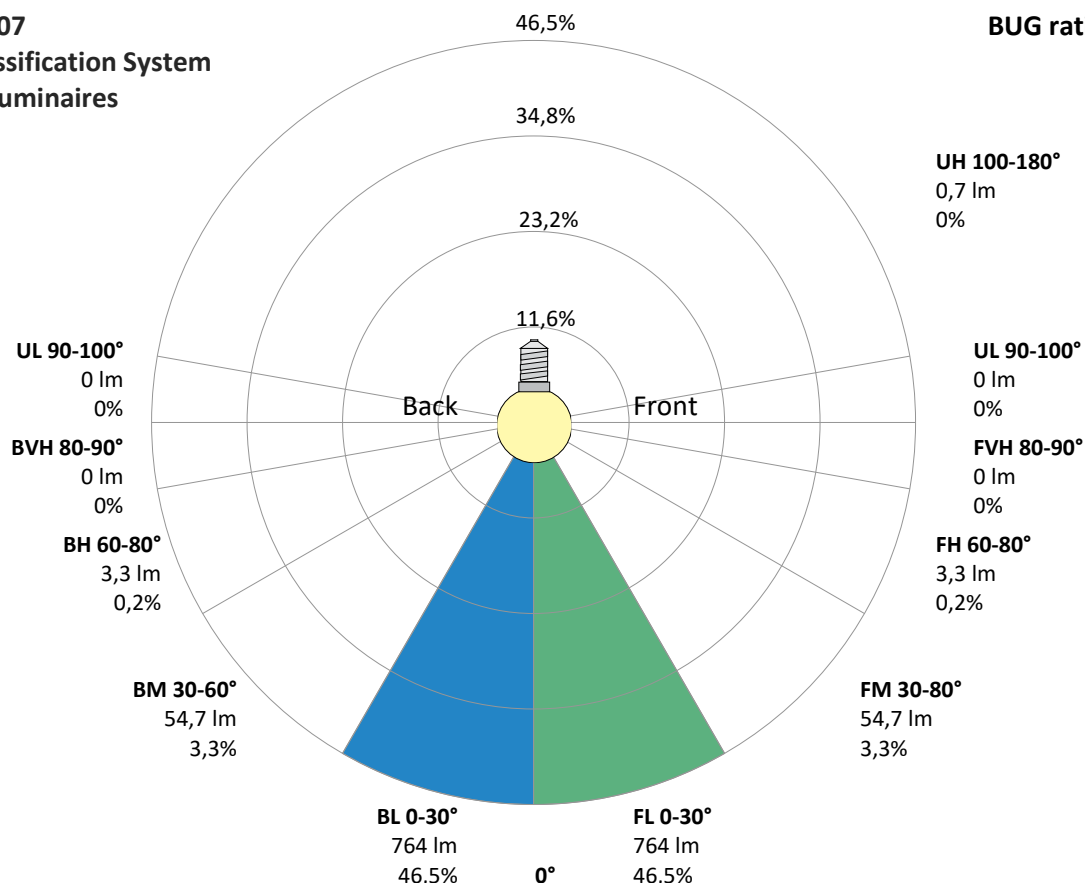

Light Measurement Report

Print date: 12-5-2025
Measurement date and time: 12-5-2025 13:13:16 – Measurement no. VFR-250512-1189-MS
Measurement tracking No. and Link: [VT250512-004391](#)
Operator:




Power Details

Input Power

Power feed to light source	31,3 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	230 V
RMS Input current feed, I_{RMS}	0,142 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	32,77 VA
Displacement factor of AC power feed	0,96
Power factor of AC current feed	0,95
Total harmonic distortion of the current	9,61%
Total harmonic distortion of the voltage	0,06%

Input Power Curve

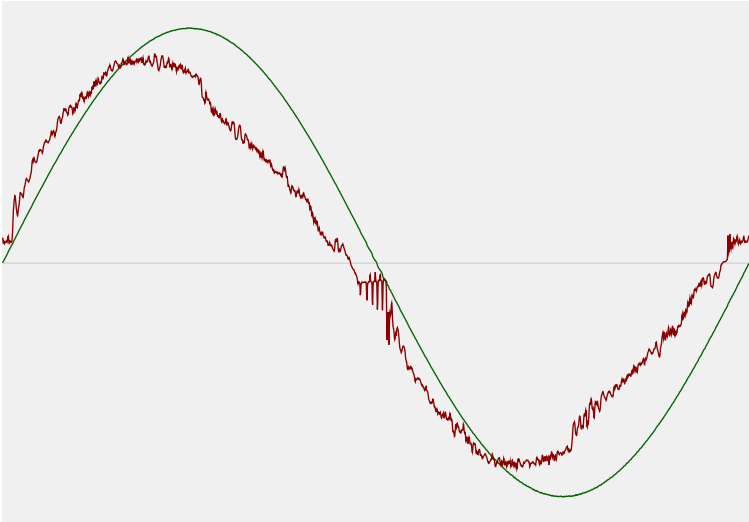

Efficiency

Radiated power efficiency	18,1%
Lumen efficiency	53 lm/W

Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	3997 K
CCT shift	+3 K
CCT end	4000 K


Warmup Result

Total warmup time	Lamp stabilized in 15 min 2 sec
Warmup variation	-0,9%

Output Change

Output start	1659 lm
Output change	-15 lm
Output end	1645 lm

Stabilization Curve

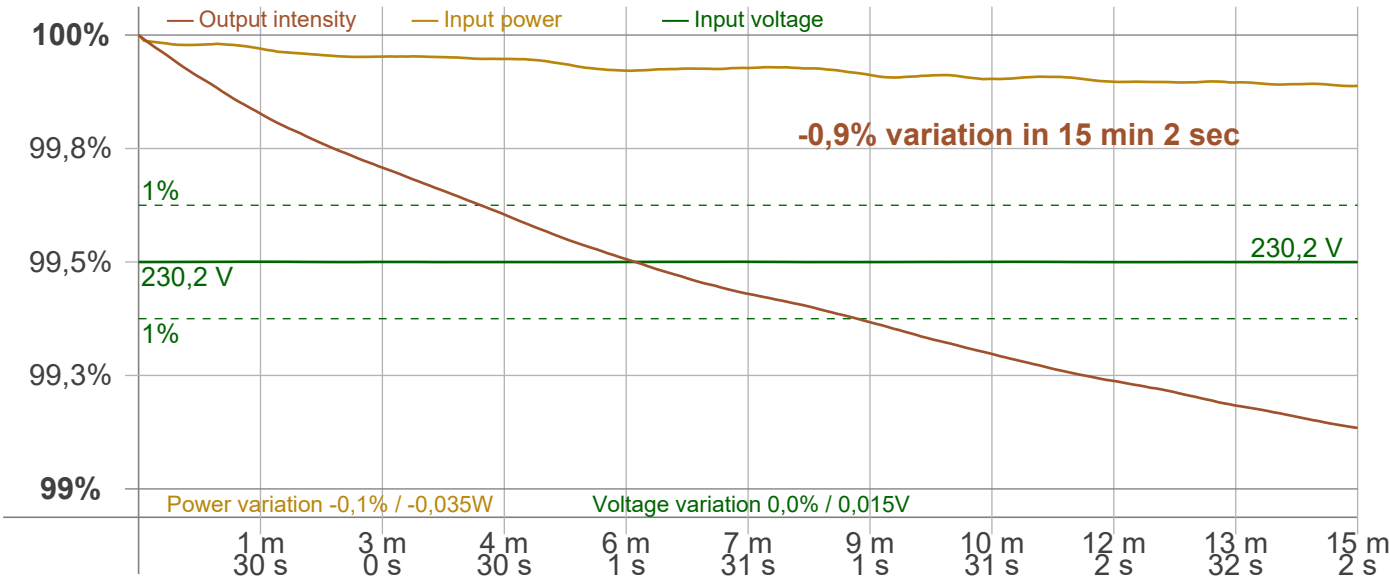

Light Measurement Report


Print date: 12-5-2025
Measurement date and time: 12-5-2025 13:13:16 – Measurement no. VFR-250512-1189-MS
Measurement tracking No. and Link: [VT250512-004391](#)
Operator:



Flicker /TLA details

Flicker Meter Type	Viso Systems LabFlicker	Measurement time	
Frequency of input power	50 Hz	PstLM	180 sec
Flicker/TLA sample rate	20000 samples/s	All other indices	1,2 sec
Flicker indices according to Illuminating Engineering Society (IES)		Flicker indices according to California Energy Commission (CEC) 2016b	
Flicker frequency	98,04 Hz	JA8/10 40 Hz	0,03 %
Percent Flicker	0,14 %	JA8/10 90 Hz	0,03 %
Flicker index	0	JA8/10 200 Hz	0,13 %
TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)		JA8/10 400 Hz	0,13 %
PstLM value (F < 80 Hz)	0,06	JA8/10 1000 Hz	0,13 %
SVM value (80 < F < 2000 Hz)	0	Flicker indices according to Lighting Research Center (2015)	
		Perception metric, Assist Mp	0,02

Flicker frame (frame of one flicker period in time domain)

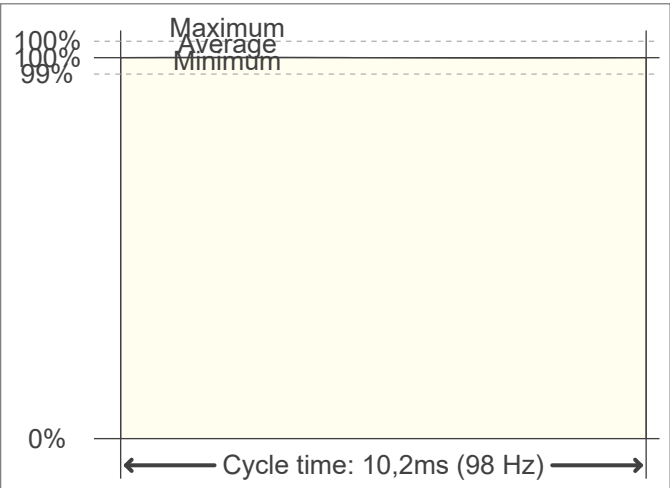

Flicker FFT (flicker curve in frequency domain)



IEEE 1789 Frequency/modulation plot

