

Light Measurement Report

Print date: 22-5-2025

Measurement date and time: 22-5-2025 11:19:59 – Measurement no. VFR-250522-1372-MS

Measurement tracking No. and Link: [VT250522-000667](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location
Goniospectrometer System and Type
Sensor Name, Calibr. Date and Serial No.
Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark
LabSpion – Type C, horizontal
LabSensor Model2 – 11-1-2024 – 3130191315
Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution
 γ (gamma)-Resolution
Test Distance
Input Power, Power and Displ. Factors
Input RMS Voltage and Current
Frequency of Input Power
Warm-up Time and Variation

12 planes – 30°
5°
10,39 m
35,3 W – PF 0,96 – DPF 0,96
230 V – 0,160 A
50 Hz
Lamp stabilized in 15 min 1 sec – 2,0%

Tested Light Source




Product Name
Item No. and Manufacturer
Product Description (line 1)

811570-6500K-36W
811570-6500K-36W – Dutchfulfillment
LED LOUVRE PANEEL | KASTRA | 120X30CM | 36W | CCT-SWITCH | ZWART

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity and Beam Angle
Correlated Color Temperature, Target/Measured
Color Rendering Index
Color Rendering TM30-18
Color Shift, CIE duv and MacAdam Steps
Flicker

4091 lm – 0,89% / 99,11%
116 lm/W
2542 cd – 83,4°
CCT = 6500 K / 6715 K
CRI 84,4
 R_f 83,7 – R_g 92,2
Duv 0,0067 – SDCM 9,6
SVM 0 – PstLM 0,01

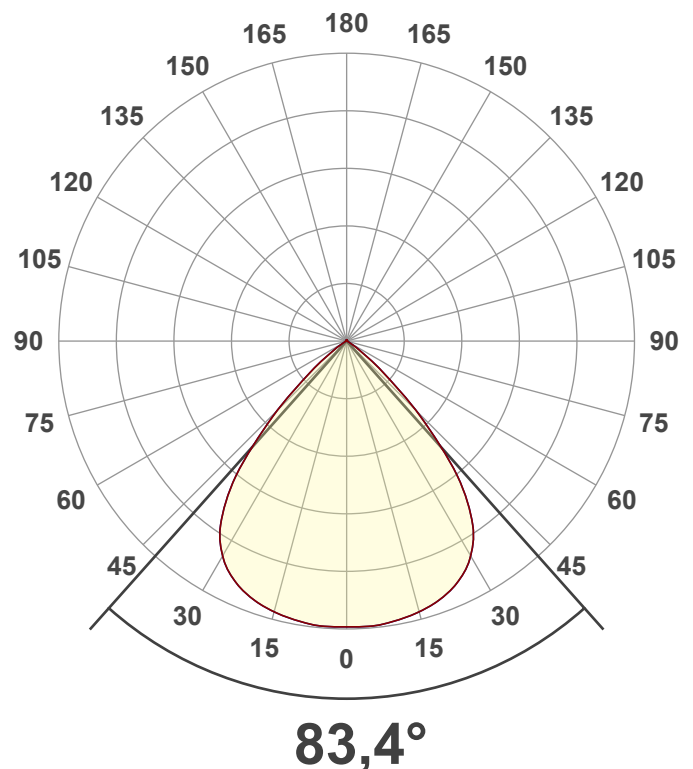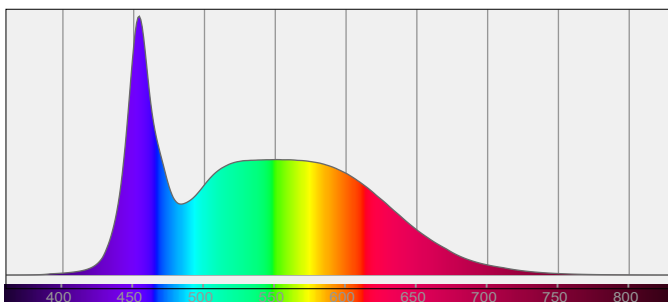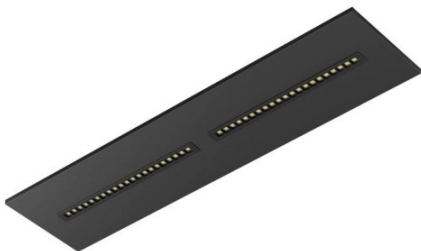

Light Measurement Report

Print date: 22-5-2025

Measurement date and time: 22-5-2025 11:19:59 – Measurement no. VFR-250522-1372-MS


Measurement tracking No. and Link: [VT250522-000667](https://www.viso-systems.com/VT250522-000667)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

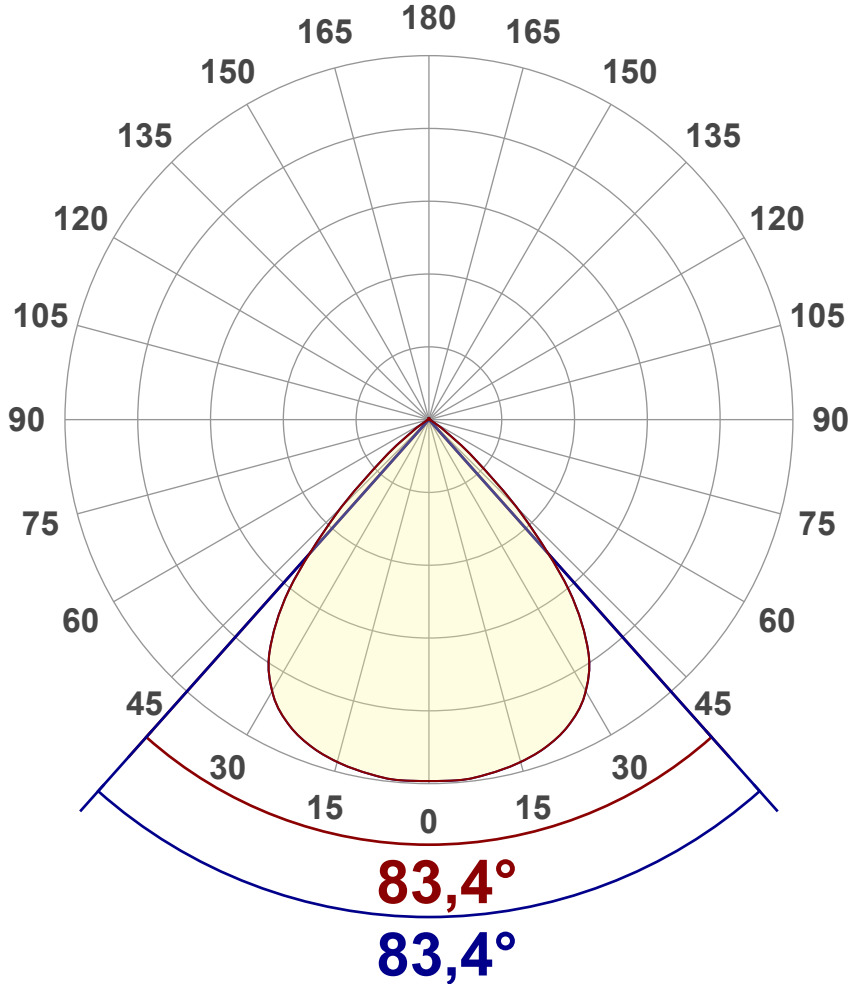

Main Values

| | |
|----------------------|----------------|
| Output (total Lumen) | 4091 lm |
| Lumen Up% / Down% | 0,89% / 99,11% |
| Peak Intensity | 2542 cd |
| Beam Angle (50%) | 83,4° |
| Beam Angle (90%) | 83,4° |
| Beam Angle (10%) | 83,4° |

Cut-off Angle

| | |
|--------------|--------|
| Average 2,5% | 116,9° |
|--------------|--------|

Field Angle

| | |
|-------------|--------|
| Average 10% | 104,8° |
|-------------|--------|


Intensity Ratio

| | |
|--------------|-------|
| In 120° cone | 98,4% |
| In 90° cone | 88,8% |

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ -angle

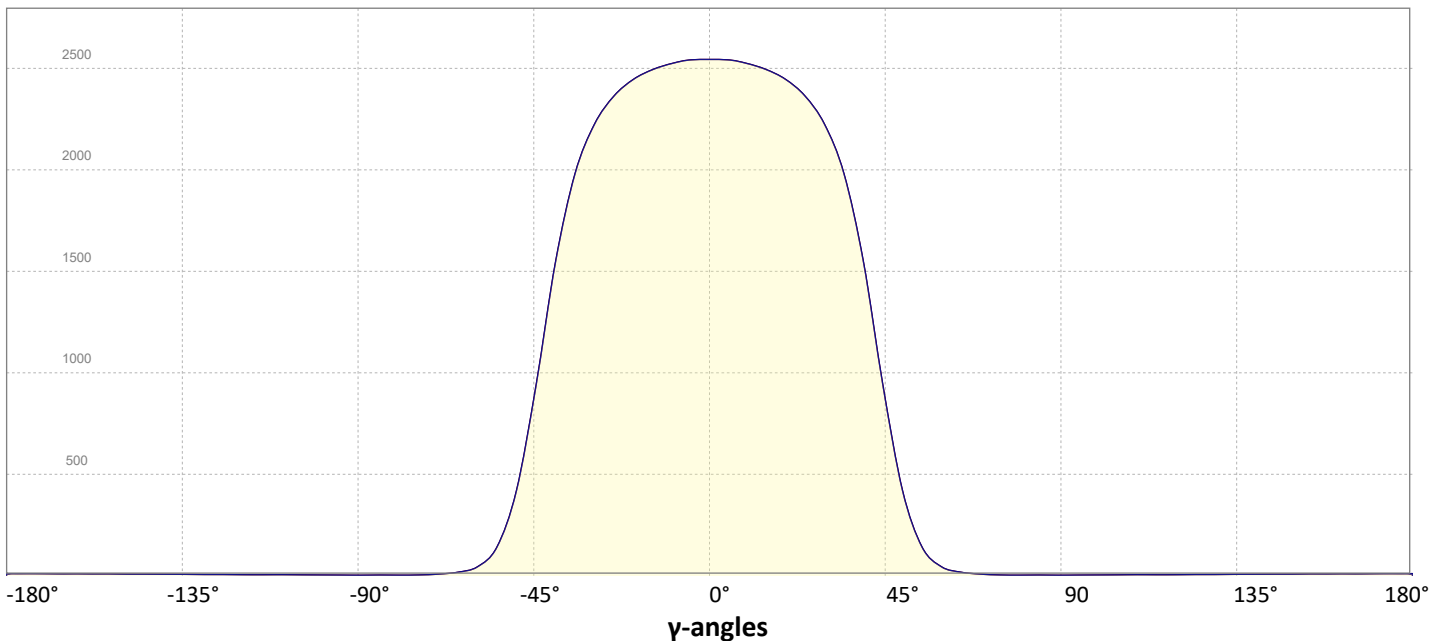

Light Measurement Report

Print date: 22-5-2025


Measurement date and time: 22-5-2025 11:19:59 – Measurement no. VFR-250522-1372-MS

Measurement tracking No. and Link: [VT250522-000667](https://vt250522-000667)

Operator:



Iso-intensity Diagram (Iso-candela)

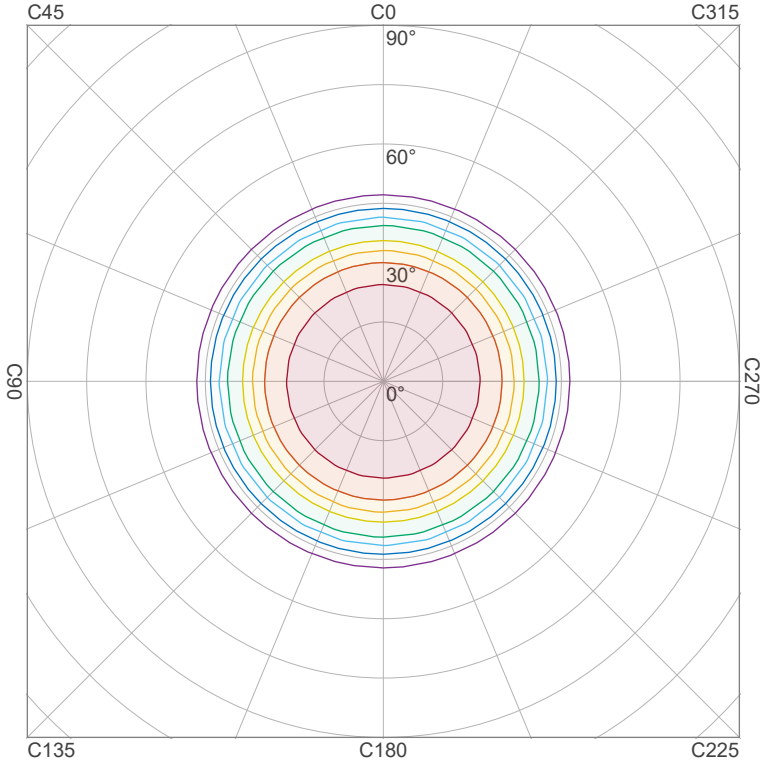


| | |
|------|-----------|
| 90 % | 2287,9 cd |
| 80 % | 2033,7 cd |
| 70 % | 1779,5 cd |
| 60 % | 1525,3 cd |
| 50 % | 1271,1 cd |
| 40 % | 1016,9 cd |
| 30 % | 762,6 cd |
| 20 % | 508,4 cd |
| 10 % | 254,2 cd |

Peak intensity: 2542,1 cd

Number of c-planes: 12

Iso-illuminance Diagram (Iso-lux)

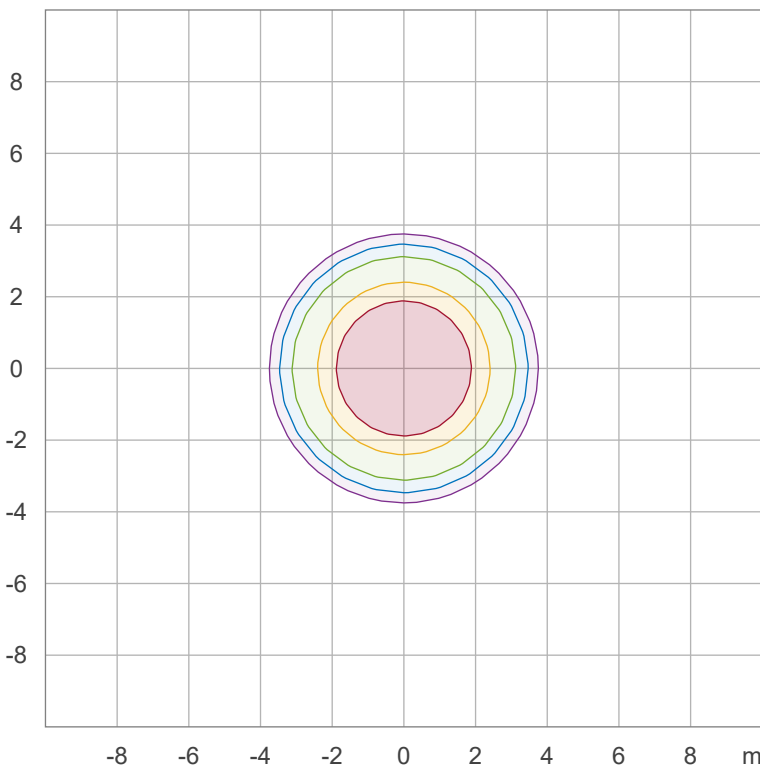

| | |
|--------|----------|
| 50,0 % | 141,2 lx |
| 30,0 % | 84,7 lx |
| 10,0 % | 28,2 lx |
| 5,0 % | 14,1 lx |
| 3,0 % | 8,5 lx |

Peak illuminance: 282,5 lx

Mounting height: 3,0 m

Number of c-planes: 12

Light Measurement Report

Print date: 22-5-2025

Measurement date and time: 22-5-2025 11:19:59 – Measurement no. VFR-250522-1372-MS

Measurement tracking No. and Link: [VT250522-000667](https://www.viso-systems.com/VT250522-000667)

Operator:




Color details


Correlated Color Temperature, Target CCT = 6500 K
 Correlated Color Temperature, Measured CCT = 6715 K
 Color Rendering Index CRI 84,4
 Color Rendering Index, R9 (red component) R9 = 10,3
 Color Rendering TM30-18 R_f 83,7 – R_g 92,2
 Color Quality Scale CQS = 82,4

MacAdam Steps SDCM = 9,6
 Color coordinates CIE 1931 (x;y) = (0,314;0,324)
 Color coordinate CIEs 1960 (u;v) = (0,200;0,310)
 Color deviation from BBL Duv = 0,0067
 Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,200;0,466)


CIE 1931

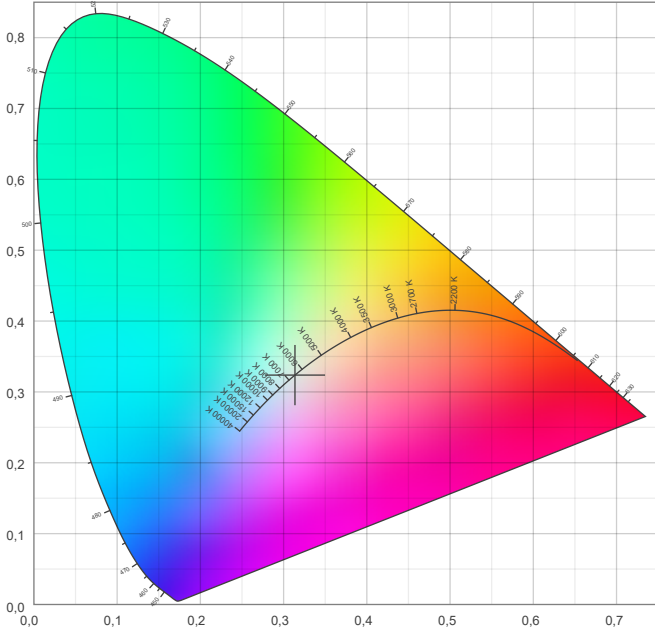

CIE 1931 – zoomed on Planckian locus

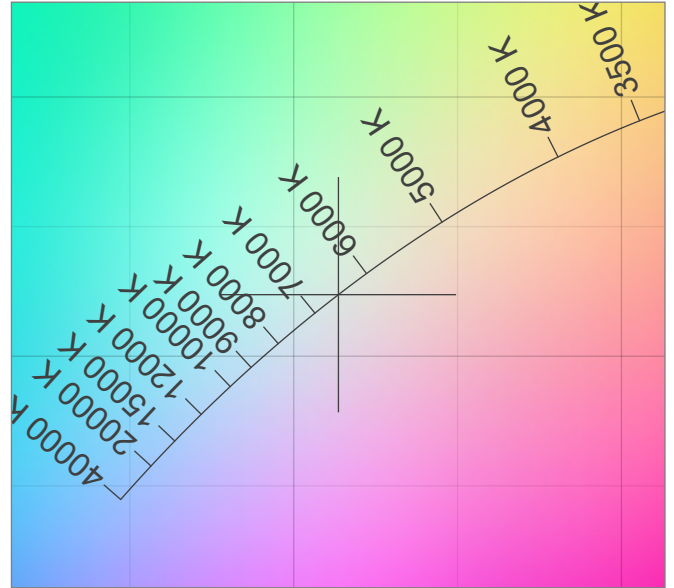


Color Rendering Index per reference color (CIE 1995)

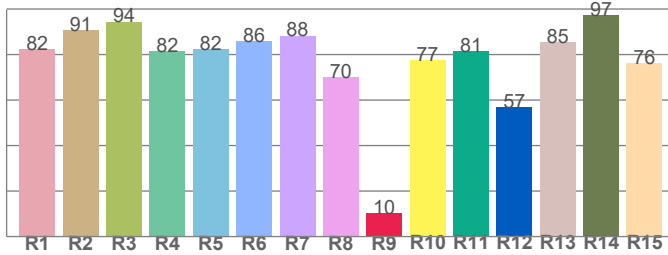


CRI R values, only R1-R8 are used to calculate final CRI value

| R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 82,4 | 90,8 | 94,4 | 81,6 | 82,2 | 85,8 | 88,3 | 70,0 | 10,3 | 77,4 | 81,4 | 56,9 | 85,4 | 97,4 | 76,3 |

Spectral power distribution (SPD) / W/nm – 0-100%

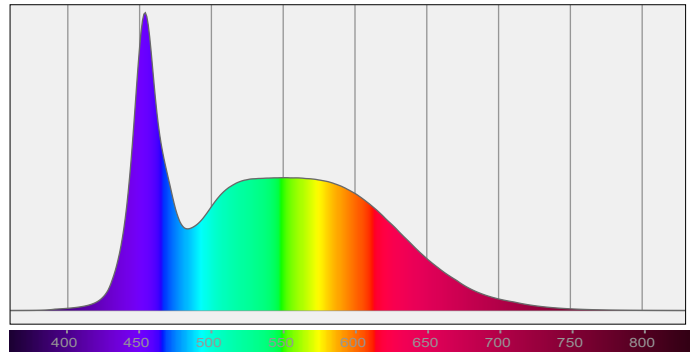


TM30-18 R_f-values per hue bin

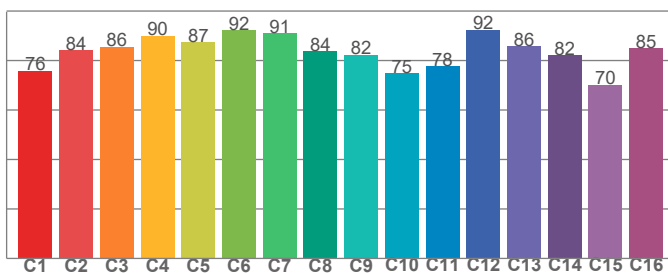

TM30 C values, 16 binned values out of total of 99 C values

| C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | C10 | C11 | C12 | C13 | C14 | C15 | C16 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 75,9 | 84,2 | 85,6 | 90,1 | 87,3 | 92,1 | 91,1 | 83,7 | 82,4 | 75,0 | 77,7 | 92,5 | 85,8 | 82,2 | 70,2 | 85,0 |

Color Quality Scale by reference color

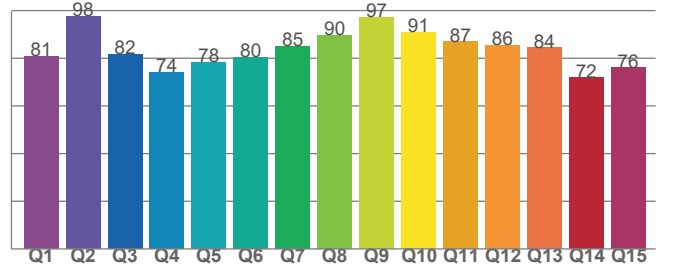

CQS Q values

| Q1 | Q2 | Q3 | Q4 | Q5 | Q6 | Q7 | Q8 | Q9 | Q10 | Q11 | Q12 | Q13 | Q14 | Q15 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 80,8 | 97,6 | 81,7 | 74,1 | 78,4 | 80,4 | 85,0 | 89,7 | 97,3 | 91,0 | 86,9 | 85,5 | 84,5 | 71,9 | 76,1 |

Light Measurement Report

Print date: 22-5-2025


Measurement date and time: 22-5-2025 11:19:59 – Measurement no. VFR-250522-1372-MS

Measurement tracking No. and Link: [VT250522-000667](https://www.viso-systems.com/VT250522-000667)

Operator:



Beam Details

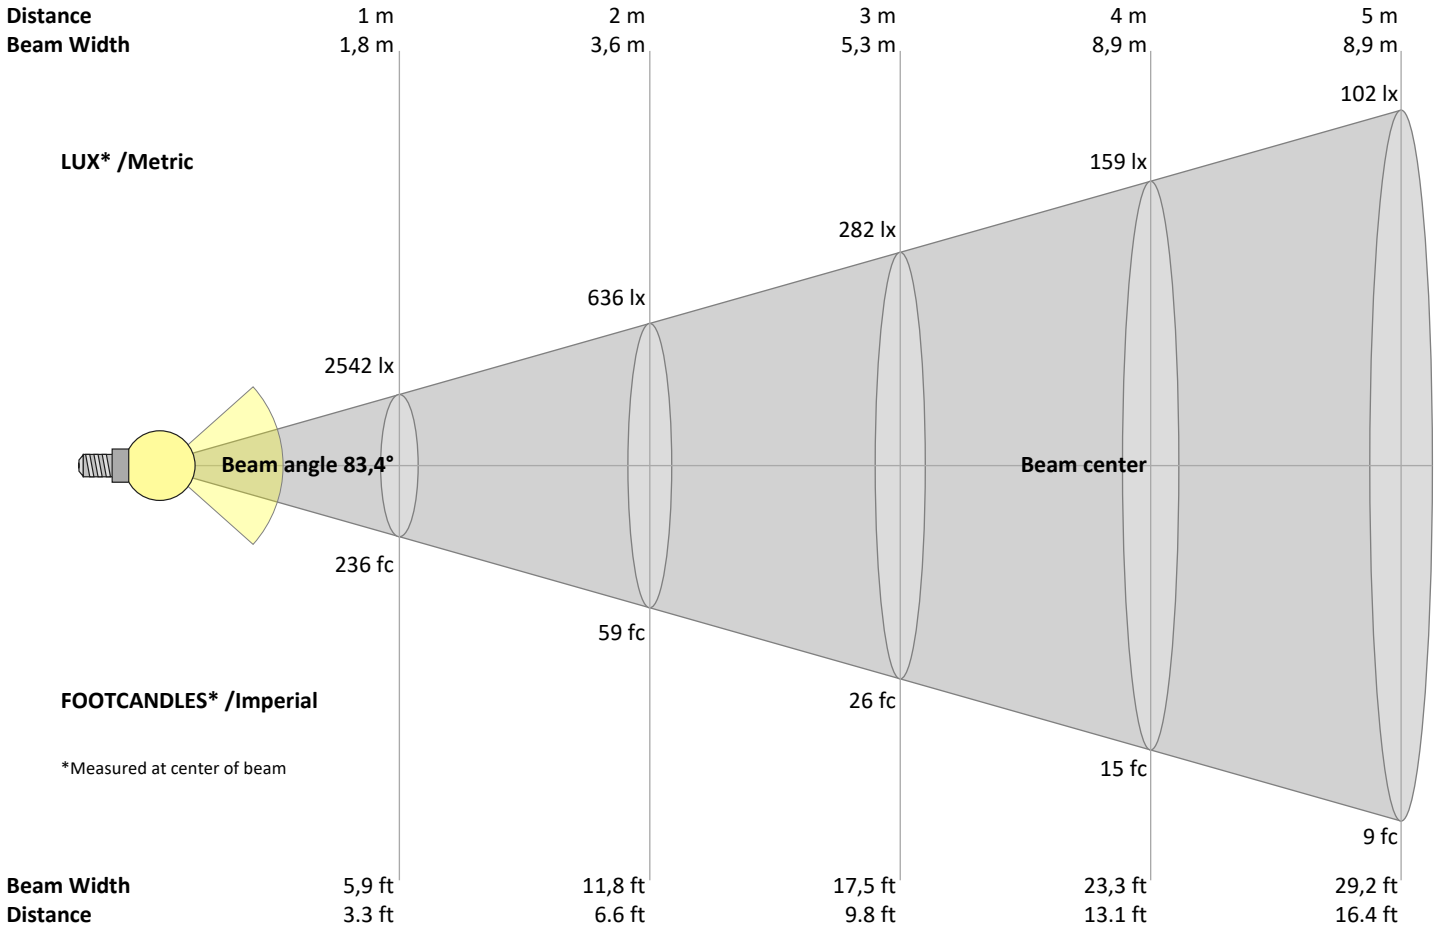

Beam intensities from 1 – 20 m

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | m |
|-------|-----|------|------|------|------|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| 3,3 | 6,6 | 9,8 | 13,1 | 16,4 | 19,7 | 23 | 26,2 | 29,5 | 32,8 | 36,1 | 39,4 | 42,7 | 45,9 | 49,2 | 52,5 | 55,8 | 59,1 | 62,3 | 65,6 | ft |
| 2542 | 636 | 282 | 159 | 102 | 71 | 52 | 40 | 31 | 25 | 21 | 18 | 15 | 13 | 11 | 10 | 9 | 8 | 7 | 6 | lux |
| 236,2 | 59 | 26,2 | 14,8 | 9,4 | 6,6 | 4,8 | 3,7 | 2,9 | 2,4 | 2 | 1,6 | 1,4 | 1,2 | 1 | 0,9 | 0,8 | 0,7 | 0,7 | 0,6 | fc |

Intensities in 0° c-plane

| 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | γ |
|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 2542 | 2540 | 2521 | 2489 | 2437 | 2349 | 2198 | 1932 | 1476 | 877 | 388 | 131 | 41 | 16 | 8 | 4 | 3 | 3 | 3 | 3 | cd |
| 100% | 100% | 99% | 98% | 96% | 92% | 86% | 76% | 58% | 34% | 15% | 5% | 2% | 1% | 0% | 0% | 0% | 0% | 0% | 0% | of 0°val |

Intensities in 90° c-plane

| 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | γ |
|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 2542 | 2540 | 2521 | 2489 | 2437 | 2349 | 2198 | 1932 | 1476 | 877 | 388 | 131 | 41 | 16 | 8 | 4 | 3 | 3 | 3 | 3 | cd |
| 100% | 100% | 99% | 98% | 96% | 92% | 86% | 76% | 58% | 34% | 15% | 5% | 2% | 1% | 0% | 0% | 0% | 0% | 0% | 0% | of 0°val |

Intensities in 180° c-plane

| 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | γ |
|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 2542 | 2540 | 2521 | 2489 | 2437 | 2349 | 2198 | 1932 | 1476 | 877 | 388 | 131 | 41 | 16 | 8 | 4 | 3 | 3 | 3 | 3 | cd |
| 100% | 100% | 99% | 98% | 96% | 92% | 86% | 76% | 58% | 34% | 15% | 5% | 2% | 1% | 0% | 0% | 0% | 0% | 0% | 0% | of 0°val |

Intensities in 270° c-plane

| 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | γ |
|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 2542 | 2540 | 2521 | 2489 | 2437 | 2349 | 2198 | 1932 | 1476 | 877 | 388 | 131 | 41 | 16 | 8 | 4 | 3 | 3 | 3 | 3 | cd |
| 100% | 100% | 99% | 98% | 96% | 92% | 86% | 76% | 58% | 34% | 15% | 5% | 2% | 1% | 0% | 0% | 0% | 0% | 0% | 0% | of 0°val |

Light Measurement Report

Print date: 22-5-2025

Measurement date and time: 22-5-2025 11:19:59 – Measurement no. VFR-250522-1372-MS

Measurement tracking No. and Link: [VT250522-000667](#)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

| Reflectances | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 |
|-------------------------------------|-----------|--|------|------|------|------|--|------|------|------|------|
| | ρ Ceiling | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 |
| | ρ Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 |
| | ρ Floor | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Room size | | Viewed Crosswise | | | | | Viewed Endwise | | | | |
| H = mounting height above eye level | | (Viewing direction orthogonal to lamp length axis) | | | | | (Viewing direction parallel to lamp length axis) | | | | |
| X | Y | | | | | | | | | | |
| 2H | 2H | 20,2 | 21,0 | 20,4 | 21,3 | 21,5 | 20,4 | 21,2 | 20,6 | 21,5 | 21,7 |
| | 3H | 19,9 | 20,8 | 20,3 | 21,1 | 21,3 | 20,1 | 21,0 | 20,5 | 21,3 | 21,5 |
| | 4H | 19,9 | 20,7 | 20,3 | 21,0 | 21,2 | 20,1 | 20,9 | 20,5 | 21,2 | 21,4 |
| | 6H | 19,9 | 20,6 | 20,2 | 20,9 | 21,3 | 20,1 | 20,8 | 20,4 | 21,1 | 21,5 |
| | 8H | 19,8 | 20,5 | 20,2 | 20,8 | 21,2 | 20,0 | 20,7 | 20,3 | 21,0 | 21,4 |
| | 12H | 19,8 | 20,4 | 20,1 | 20,8 | 21,2 | 20,0 | 20,6 | 20,3 | 21,0 | 21,4 |
| 4H | 2H | 19,9 | 20,7 | 20,3 | 21,0 | 21,3 | 20,1 | 20,9 | 20,5 | 21,2 | 21,4 |
| | 3H | 19,8 | 20,5 | 20,2 | 20,8 | 21,3 | 20,0 | 20,6 | 20,3 | 21,0 | 21,4 |
| | 4H | 19,6 | 20,3 | 20,1 | 20,7 | 21,2 | 19,8 | 20,5 | 20,3 | 20,9 | 21,4 |
| | 6H | 19,6 | 20,2 | 20,1 | 20,5 | 20,9 | 19,8 | 20,4 | 20,3 | 20,7 | 21,1 |
| | 8H | 19,5 | 20,1 | 20,0 | 20,4 | 20,8 | 19,7 | 20,3 | 20,2 | 20,6 | 21,0 |
| | 12H | 19,5 | 19,9 | 20,0 | 20,3 | 20,8 | 19,7 | 20,1 | 20,2 | 20,5 | 21,0 |
| 8H | 4H | 19,5 | 20,1 | 20,0 | 20,4 | 20,8 | 19,7 | 20,3 | 20,2 | 20,6 | 21,0 |
| | 6H | 19,5 | 19,8 | 20,0 | 20,3 | 20,9 | 19,6 | 20,0 | 20,2 | 20,5 | 21,1 |
| | 8H | 19,5 | 19,8 | 20,0 | 20,3 | 20,9 | 19,6 | 20,0 | 20,2 | 20,5 | 21,1 |
| | 12H | 19,4 | 19,7 | 20,0 | 20,2 | 20,8 | 19,6 | 19,9 | 20,2 | 20,4 | 21,0 |
| 12H | 4H | 19,5 | 19,9 | 20,0 | 20,3 | 20,8 | 19,6 | 20,1 | 20,2 | 20,5 | 21,0 |
| | 6H | 19,5 | 19,8 | 20,0 | 20,3 | 20,9 | 19,6 | 20,0 | 20,2 | 20,5 | 21,1 |
| | 8H | 19,4 | 19,7 | 20,0 | 20,2 | 20,8 | 19,6 | 19,8 | 20,2 | 20,4 | 21,0 |

Variations with the observer position for the luminaire spacings, S:

| | | |
|----------|-------------|-------------|
| S = 1.0H | 2,2 / -9,0 | 2,2 / -8,8 |
| S = 1.5H | 4,5 / -15,5 | 4,5 / -14,9 |
| S = 2.0H | 6,4 / -18,0 | 6,4 / -17,0 |

Coefficients of Utilization

| Ceiling reflectance | 80 | | | 70 | | | 50 | | | 30 | | | 10 | | | 0 | | |
|---------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| Wall reflectance | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| Floor reflectance | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 0 |
| RCR | (RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumen delivered to the task surface | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 101 | 101 | 101 | 99 |
| 1 | 112 | 109 | 106 | 104 | 110 | 107 | 104 | 102 | 103 | 101 | 99 | 99 | 97 | 96 | 95 | 94 | 93 | 91 |
| 2 | 106 | 100 | 95 | 92 | 103 | 98 | 94 | 90 | 95 | 91 | 88 | 92 | 89 | 86 | 89 | 86 | 84 | 83 |
| 3 | 99 | 92 | 86 | 81 | 97 | 90 | 85 | 81 | 87 | 83 | 79 | 85 | 81 | 78 | 82 | 79 | 77 | 75 |
| 4 | 93 | 84 | 78 | 73 | 91 | 83 | 77 | 72 | 81 | 75 | 71 | 78 | 74 | 70 | 76 | 73 | 70 | 68 |
| 5 | 87 | 77 | 71 | 66 | 85 | 76 | 70 | 65 | 74 | 69 | 65 | 73 | 68 | 64 | 71 | 67 | 63 | 62 |
| 6 | 82 | 71 | 64 | 59 | 80 | 70 | 64 | 59 | 69 | 63 | 59 | 67 | 62 | 58 | 66 | 61 | 58 | 56 |
| 7 | 77 | 66 | 59 | 54 | 75 | 65 | 59 | 54 | 64 | 58 | 54 | 62 | 57 | 53 | 61 | 56 | 53 | 51 |
| 8 | 72 | 61 | 54 | 49 | 71 | 60 | 54 | 49 | 59 | 53 | 49 | 58 | 53 | 49 | 57 | 52 | 48 | 47 |
| 9 | 68 | 57 | 50 | 45 | 67 | 56 | 50 | 45 | 55 | 49 | 45 | 54 | 49 | 45 | 53 | 48 | 45 | 43 |
| 10 | 64 | 53 | 46 | 42 | 63 | 52 | 46 | 42 | 51 | 46 | 42 | 51 | 45 | 41 | 50 | 45 | 41 | 40 |

Light Measurement Report

Print date: 22-5-2025

Measurement date and time: 22-5-2025 11:19:59 – Measurement no. VFR-250522-1372-MS

Measurement tracking No. and Link: [VT250522-000667](https://www.viso-systems.com/VT250522-000667)


Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

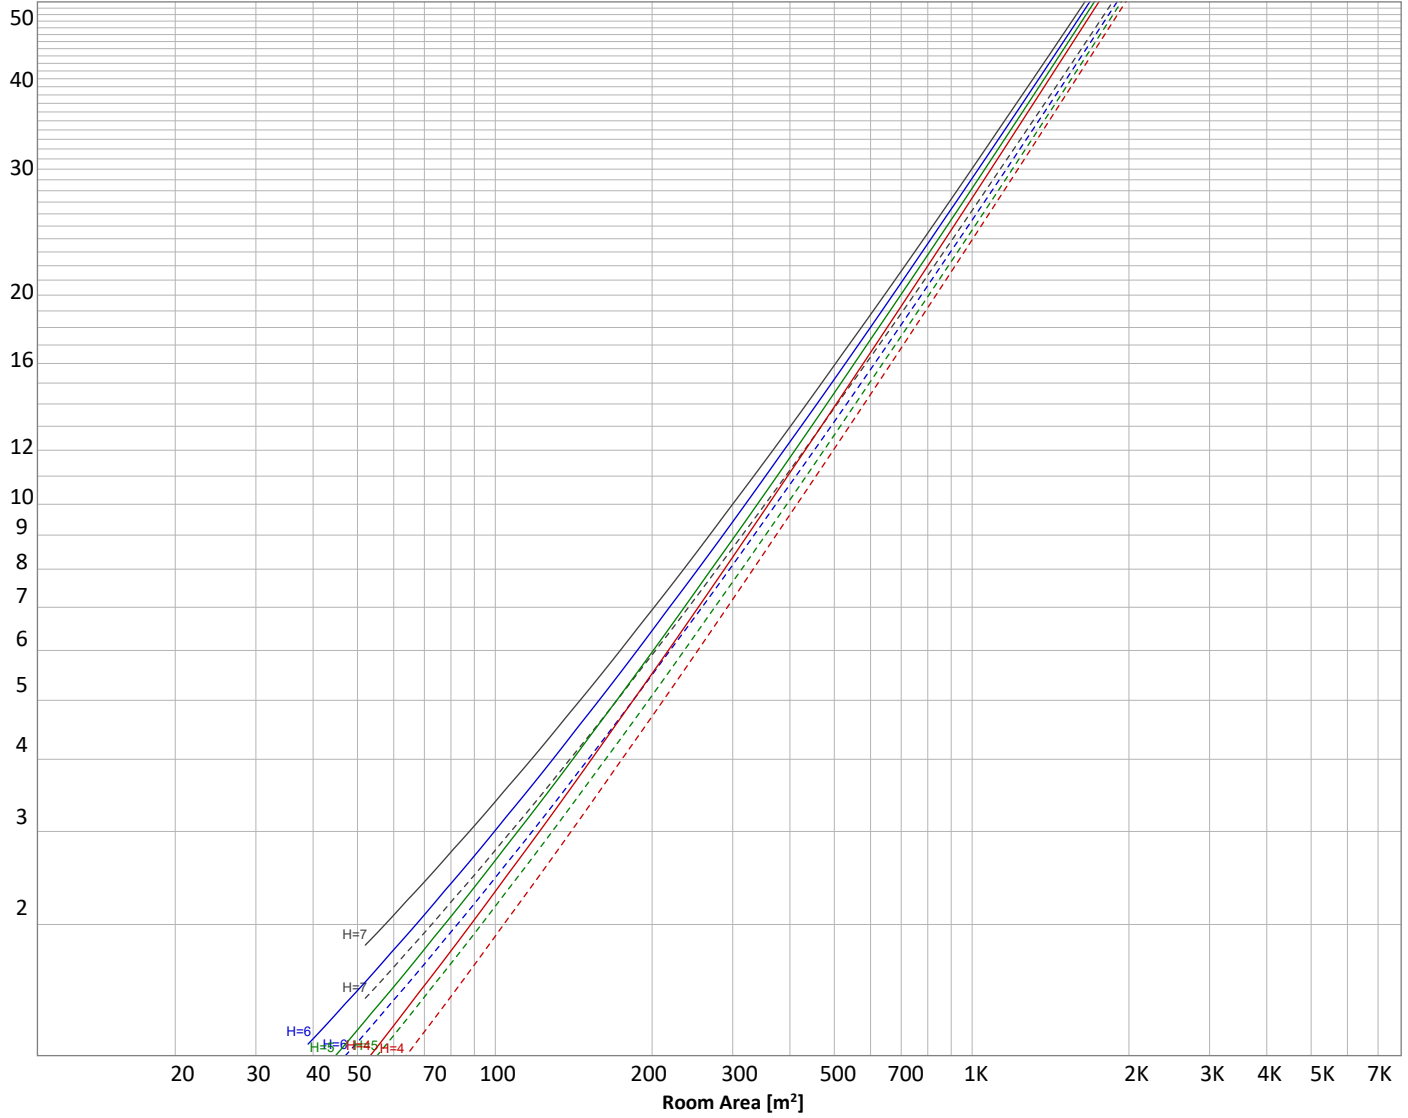

Conditions

| | | | | | |
|---|----------------|-----------|---------------------|--------------------------|-------------------|
| H = Room height | Flux = 4091 lm | | | | |
| H _{down} = Lamp distance from ceiling = | 0.00 m | Line type | Ceiling reflectance | ρ(%) Wall reflectance | Floor reflectance |
| H _{work} = Work area height from floor = | 0.00 m | ----- | 70 | 50 | 30 |
| E _{work} = Average lux on work area = | 100 lx | _____ | 50 | 30 | 20 |

Zonal Lumen Summary

| 0°-10° | 10°-20° | 20°-30° | 30°-40° | 40°-50° | 50°-60° | 60°-70° | 70°-80° | 80°-90° |
|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 242 lm | 703 lm | 1078 lm | 1180 lm | 679 lm | 145 lm | 19,3 lm | 4,60 lm | 3,49 lm |
| 90°-100° | 100°-110° | 110°-120° | 120°-130° | 130°-140° | 140°-150° | 150°-160° | 160°-170° | 170°-180° |
| 3,68 lm | 4,72 lm | 4,92 lm | 5,21 lm | 5,37 lm | 4,85 lm | 4,00 lm | 2,64 lm | 0,958 lm |

Light Measurement Report

Print date: 22-5-2025

Measurement date and time: 22-5-2025 11:19:59 – Measurement no. VFR-250522-1372-MS

Measurement tracking No. and Link: [VT250522-000667](https://www.viso-systems.com/VT250522-000667)

Operator:



Outdoor Light Planning

Lumen per Zone

| Zone (γ) | Lumen | % Total |
|--------------|----------------|---------------|
| 0-10° | 242 lm | 5,9% |
| 10-20° | 703 lm | 17,2% |
| 20-30° | 1078 lm | 26,4% |
| 30-40° | 1180 lm | 28,8% |
| 40-50° | 679 lm | 16,6% |
| 50-60° | 145 lm | 3,5% |
| 60-70° | 19 lm | 0,5% |
| 70-80° | 5 lm | 0,1% |
| 80-90° | 3 lm | 0,1% |
| 90-100° | 4 lm | 0,1% |
| 100-110° | 5 lm | 0,1% |
| 110-120° | 5 lm | 0,1% |
| 120-130° | 5 lm | 0,1% |
| 130-140° | 5 lm | 0,1% |
| 140-150° | 5 lm | 0,1% |
| 150-160° | 4 lm | 0,1% |
| 160-170° | 3 lm | 0,1% |
| 170-180° | 1 lm | 0,0% |
| Total | 4091 lm | 100,0% |

Intensity peaks

| | |
|----------------|---------|
| Max intensity | 2542 cd |
| Intensity, 90° | 3 cd |
| Intensity, 0° | 2542 cd |

Zonal Lumen summary


| Zone (γ) | Lumen | % Total |
|----------|---------|---------|
| 0-30° | 2023 lm | 49,5% |
| 0-40° | 3204 lm | 78,3% |
| 0-60° | 4028 lm | 98,4% |
| 60-90° | 27 lm | 0,7% |
| 70-100° | 12 lm | 0,3% |
| 90-120° | 13 lm | 0,3% |
| 0-90° | 4055 lm | 99,1% |
| 90-180° | 36 lm | 0,9% |
| 0-180° | 4091 lm | 100,0% |

BUG rating

| | Lumen | % Total |
|----------------------|---------|---------|
| Forward light | | |
| Low(0-30°) | 1011 lm | 24,7% |
| Medium(30-60°) | 1003 lm | 24,5% |
| High(60-80°) | 12 lm | 0,3% |
| Very high(80-90°) | 2 lm | 0,0% |
| Back light | | |
| Low(0-30°) | 1011 lm | 24,7% |
| Medium(30-60°) | 1003 lm | 24,5% |
| High(60-80°) | 12 lm | 0,3% |
| Very high(80-90°) | 2 lm | 0,0% |
| Uplight | | |
| Low(90-100°) | 4 lm | 0,1% |
| High(100-180°) | 33 lm | 0,8% |

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B3 U2 G0

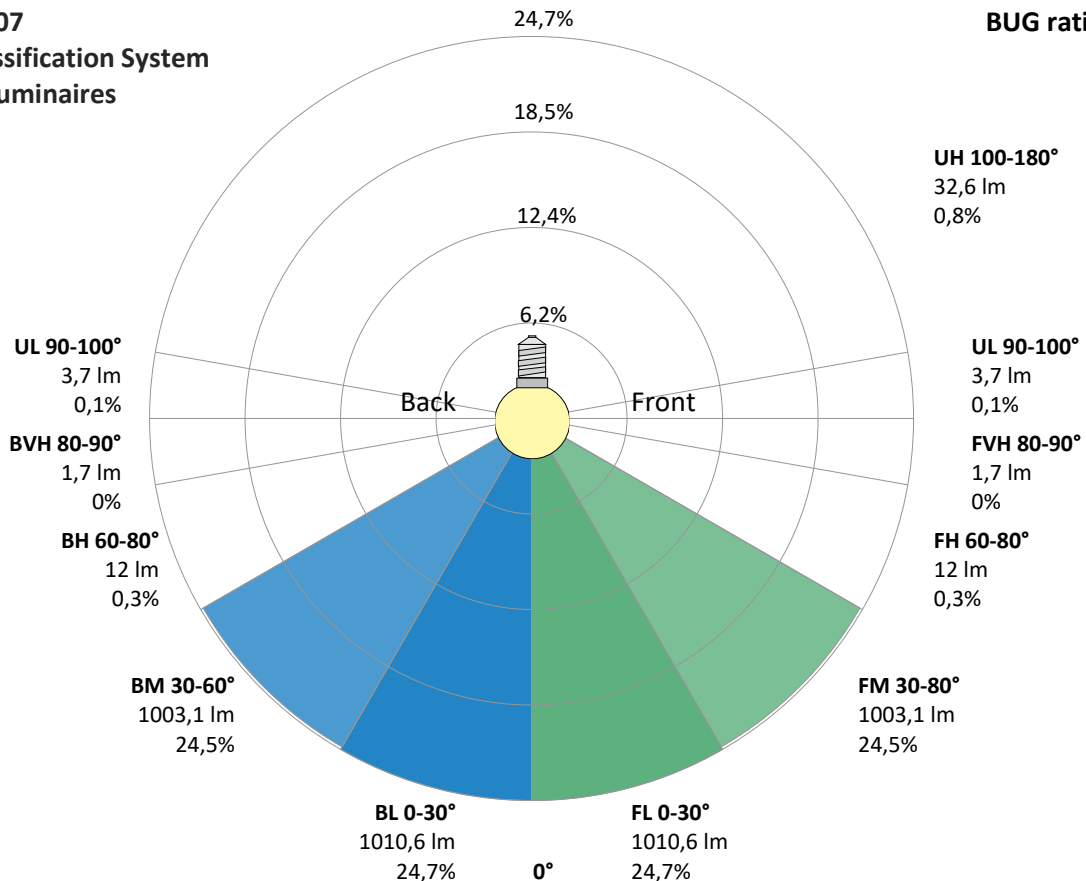

Light Measurement Report

Print date: 22-5-2025

Measurement date and time: 22-5-2025 11:19:59 – Measurement no. VFR-250522-1372-MS

Measurement tracking No. and Link: [VT250522-000667](#)

Operator:




Power Details


Input Power

| | |
|---|----------|
| Power feed to light source | 35,3 W |
| Frequency of input power | 50 Hz |
| RMS Input voltage feed, V_{RMS} | 230 V |
| RMS Input current feed, I_{RMS} | 0,160 A |
| Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$ | 36,79 VA |
| Displacement factor of AC power feed | 0,96 |
| Power factor of AC current feed | 0,96 |
| Total harmonic distortion of the current | 9,83% |
| Total harmonic distortion of the voltage | 0,06% |

Input Power Curve

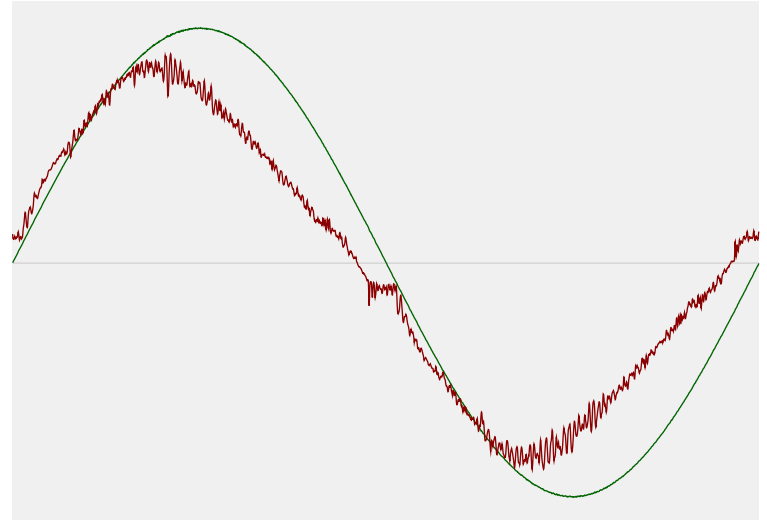

Efficiency

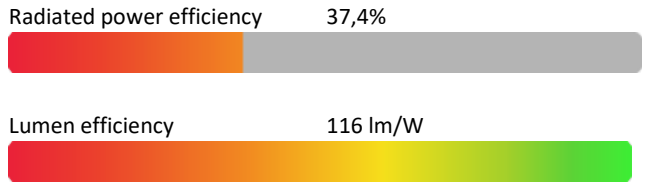

Stabilization Details

Warmup Conditions

| | |
|-------------------|--------|
| Stable period | 15 min |
| Stable change max | 2,0% |
| Minimum time | 15 min |

Color Temperature Change

| | |
|-----------|--------|
| CCT start | 6444 K |
| CCT shift | +56 K |
| CCT end | 6500 K |


Warmup Result

| | |
|-------------------|---------------------------------|
| Total warmup time | Lamp stabilized in 15 min 1 sec |
| Warmup variation | -1,5% |

Output Change

| | |
|---------------|---------|
| Output start | 4152 lm |
| Output change | -61 lm |
| Output end | 4091 lm |

Stabilization Curve

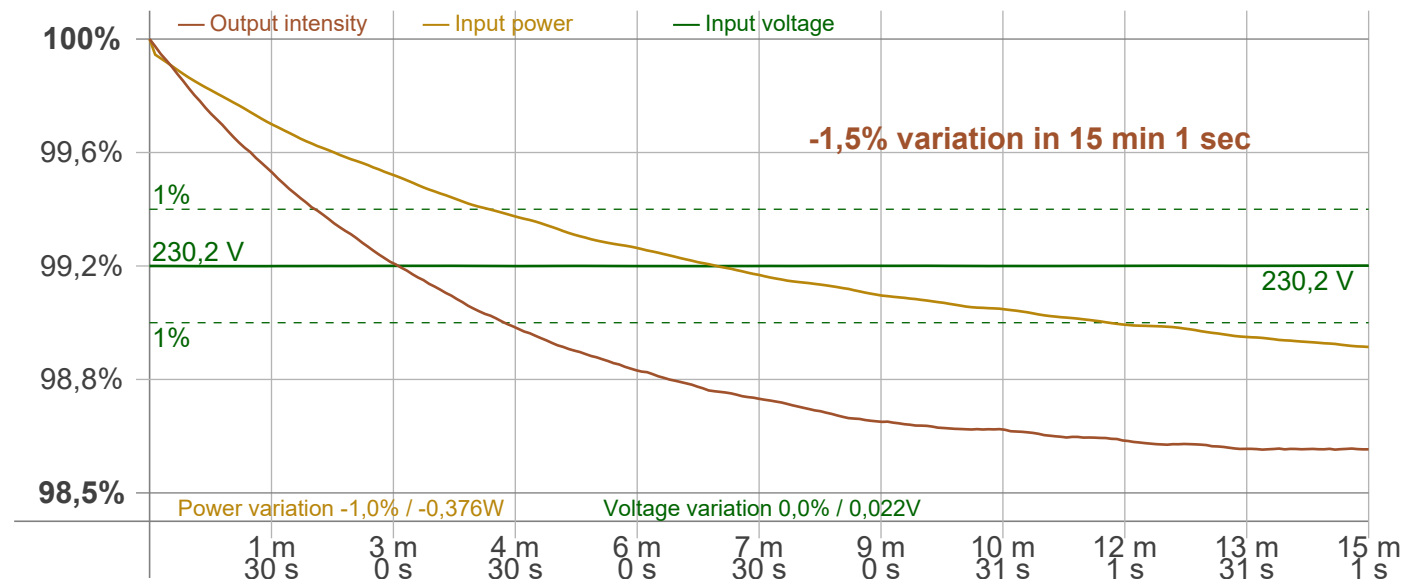

Light Measurement Report

Print date: 22-5-2025

Measurement date and time: 22-5-2025 11:19:59 – Measurement no. VFR-250522-1372-MS

Measurement tracking No. and Link: [VT250522-000667](https://www.viso-systems.com/VT250522-000667)

Operator:



Flicker /TLA details

Flicker Meter Type: Viso Systems LabFlicker
 Frequency of input power: 50 Hz
 Flicker/TLA sample rate: 20000 samples/s

Measurement time
 PstLM: 180 sec
 All other indices: 1,2 sec

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency: 100 Hz
 Percent Flicker: 0,08 %
 Flicker index: 0

Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz: 0,01 %
 JA8/10 90 Hz: 0,02 %
 JA8/10 200 Hz: 0,06 %
 JA8/10 400 Hz: 0,07 %
 JA8/10 1000 Hz: 0,07 %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value (F < 80 Hz): 0,01
 SVM value (80 < F < 2000 Hz): 0

Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp: 0,01

Flicker frame (frame of one flicker period in time domain)

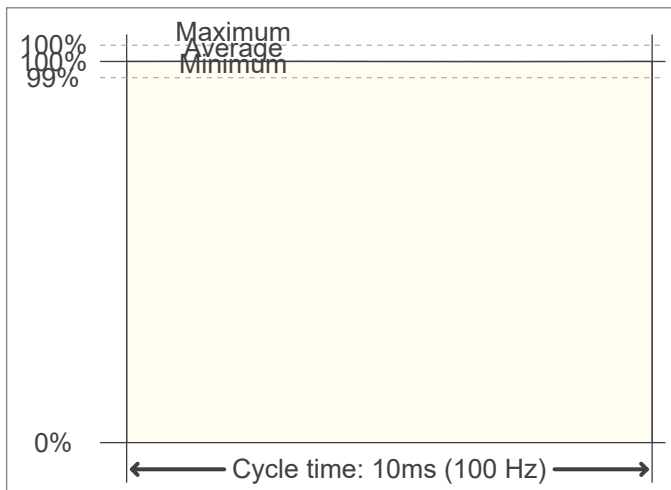

Flicker FFT (flicker curve in frequency domain)



IEEE 1789 Frequency/modulation plot

