

Foreword

Thanks for choosing our LED Panel Light. We strongly recommend you to read this manual carefully before installation and usage. Make sure you have completely understood the assembly instructions so as to ensure normal working of LED Panel Light.

Safety Warnings


In order to ensure a perfect quality of the product and a safe usage, please kindly follow the instructions:

1. Before opening the package, please check if there's damage or defect during transportation, if damage occurs, please don't use it and inform your supplier immediately.
2. Should the product be found damaged in any way, please keep it in package and contact your supplier in time.
3. Please do not attempt to use a damaged product.
4. The product should be installed, dismantled and maintained by a qualified electrician; Suppliers don't take charge of any problems or damages that occur due to mishandling such as an operation not permitted in this manual.
5. Choose an install place where can withstand 10 times the weight of the product to ensure a solid installation.
6. Wipe the lampshade and veil with soft cloth dipped a little neutral detergent, be sure not to use any sandpaper, polishing powder or alcohol, gasoline and so on liquor.
7. Don't connect cables with powered-on; make sure a correct connection and no short circuit checked with instrument before powered-on.
8. For non-replaceable light sources: "The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced."
9. If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by a special cord or cord exclusively available from the manufacturer or his service agent.
10. Indoor use only.


This manual applies to this model product only, for more information, please contact our staff.

USER MANUAL


LED Panel Light




Suspended Installation



Recessed Installation



Recessed Installation with spring



CONTENTS

Product Parameter	1
Product dimension(mm)	1
Installation	1-2
3CCT regulation	2
Foreword	3
Safety Warnings	3

Product Parameter


Color temperature of panel light:3000K/4000K/6000K

Operating temperature:0~+40°C

Item	Power	Voltage	Beam angle	PF	CRI	Net Weight
1500*300 Panel Light	40W	220-240V	90deg	0.9	80	2.5 kg


*The power input voltage should be based on the product label.

Product dimension(mm)

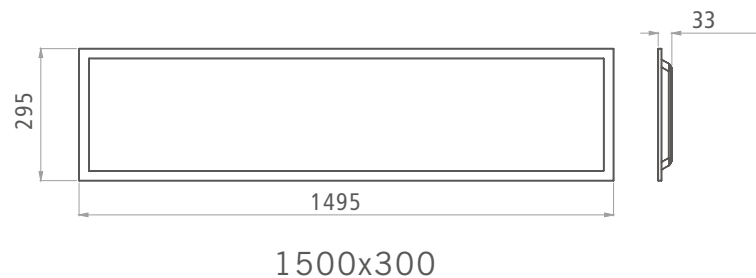


Recessed Installation


1. Take out the false ceiling block that are identical size as panel light.



2. Wiring driver and all other necessary accessories.




3. Fix the panel light into right place, Power on.




1

Suspended Installation


1. Necessary accessories.

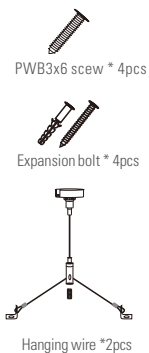


2. Fix the hanging wires onto ceiling in order with expansion bolts.



3. Fixing the other two ends of hanging wires on panel light with PWB3X6, adjusting suitable distance between two ends to make sure panel light is located in horizontal level safely.

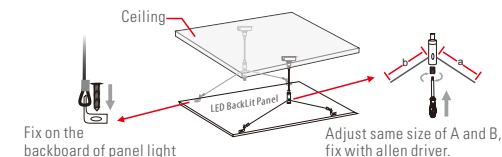


4. Adjust the length of stainless wire to the suitable height.




Recessed Installation with spring


1. Necessary accessories.



2. Fix PWB3*6 screw on backboard of panel light as shown below.



3. Wiring driver and all other necessary accessories Fix the panel light into right place with spring.




4. Power on



3CCT regulation

3 CCT- in- 1 panel, adjusted with DIP switch to meet different CCT requirement.

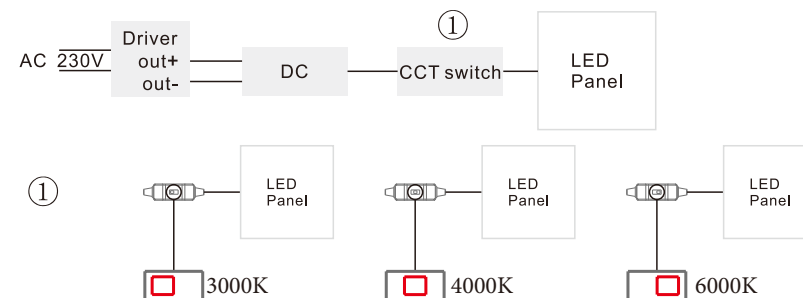

2