

Light Measurement Report

Print date: 7-1-2025

Measurement date and time: 7-1-2025 14:27:19 – Measurement no. VFR-250107-2758-MS

Measurement tracking No. and Link: [VT250107-005744](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location

Goniospectrometer System and Type

Sensor Name, Calibr. Date and Serial No.

Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark

LabSpion – Type C, horizontal

LabSensor Model2 – 11-1-2024 – 3130191315

Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution

γ (gamma)-Resolution

Test Distance

Input Power, Power and Displ. Factors

Input RMS Voltage and Current

Frequency of Input Power

Warm-up Time and Variation

24 planes – 15°

5°

2,00 m

10,7 W – PF 0,92 – DPF 1,0

230 V – 0,050 A

50 Hz

Lamp stabilized in 15 min 2 sec – 2,0%

Tested Light Source

Product Name

Item No. and Manufacturer

Product Description (line 1)

801298-2700K

801298-2700K – Dutchfulfillment

LED AR111 | GU10 | SPOT | 24° | 12W | WIT

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)

Efficiency

Peak Intensity and Beam Angle

Correlated Color Temperature, Target/Measured

Color Rendering Index

Color Rendering TM30-18

Color Shift, CIE duv and MacAdam Steps

Flicker

812 lm – 0,11% / 99,89%

76 lm/W

1599 cd – 29,1°



CCT = 2700 K / 2757 K

CRI 83,1

R_f 86,5 – R_g 94,8

Duv 0,0028 – SDCM 3,7

SVM 0,11 – PstLM 0,15

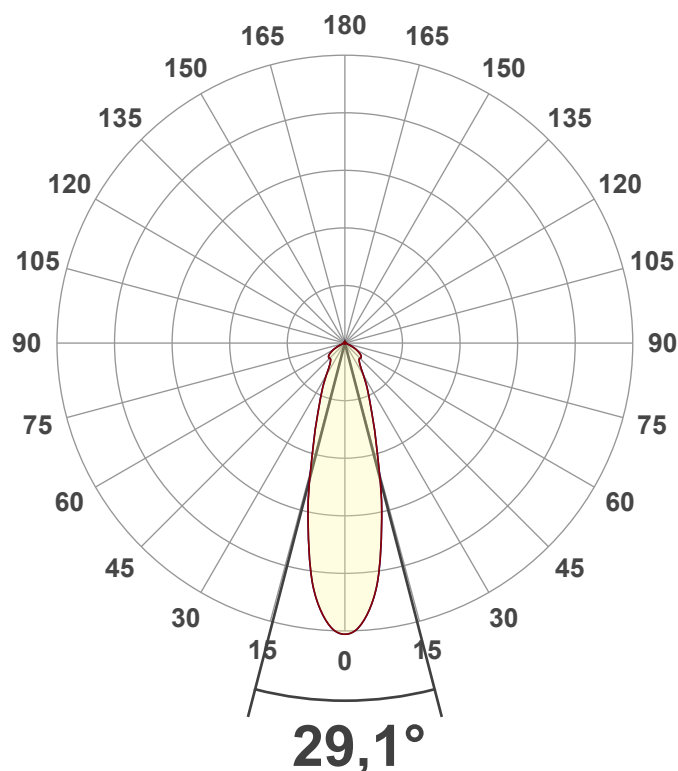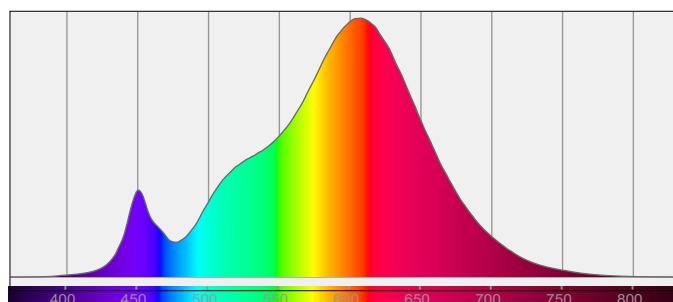

Light Measurement Report

Print date: 7-1-2025

Measurement date and time: 7-1-2025 14:27:19 – Measurement no. VFR-250107-2758-MS


Measurement tracking No. and Link: [VT250107-005744](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

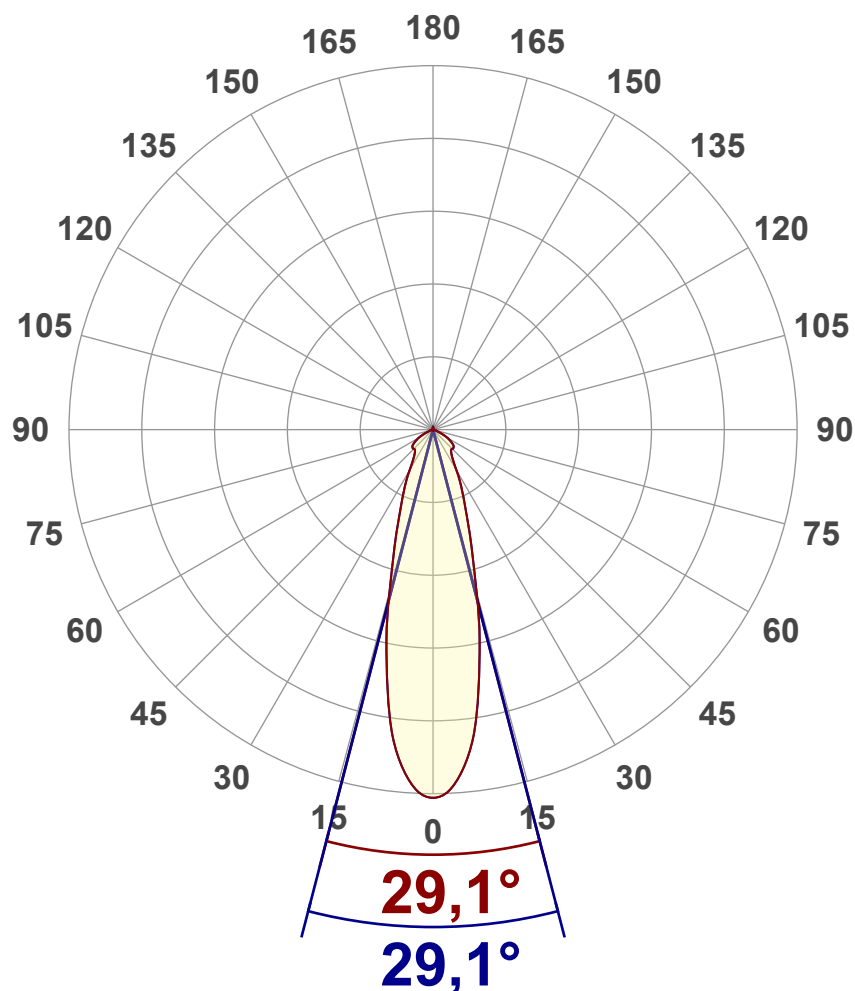

Main Values

Output (total Lumen)	812 lm
Lumen Up% / Down%	0,11% / 99,89%
Peak Intensity	1599 cd
Beam Angle (50%)	29,1°
Beam Angle (90%)	29,1°
Beam Angle (10%)	29,1°

Cut-off Angle

Average 2,5%	130,6°
--------------	--------

Field Angle

Average 10%	67,6°
-------------	-------


Intensity Ratio

In 120° cone	94,3%
In 90° cone	77,1%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

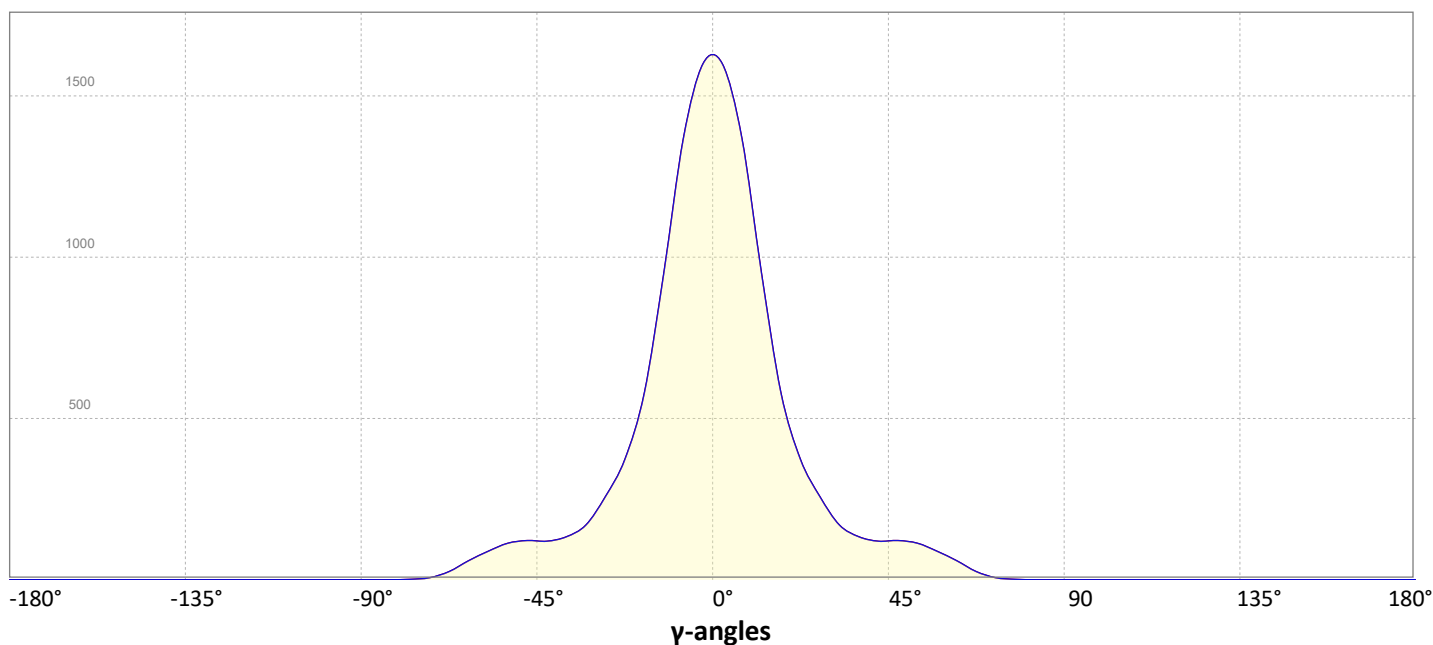


Light Measurement Report


Print date: 7-1-2025
Measurement date and time: 7-1-2025 14:27:19 – Measurement no. VFR-250107-2758-MS
Measurement tracking No. and Link: [VT250107-005744](#)
Operator:



Iso-intensity Diagram (Iso-candela)

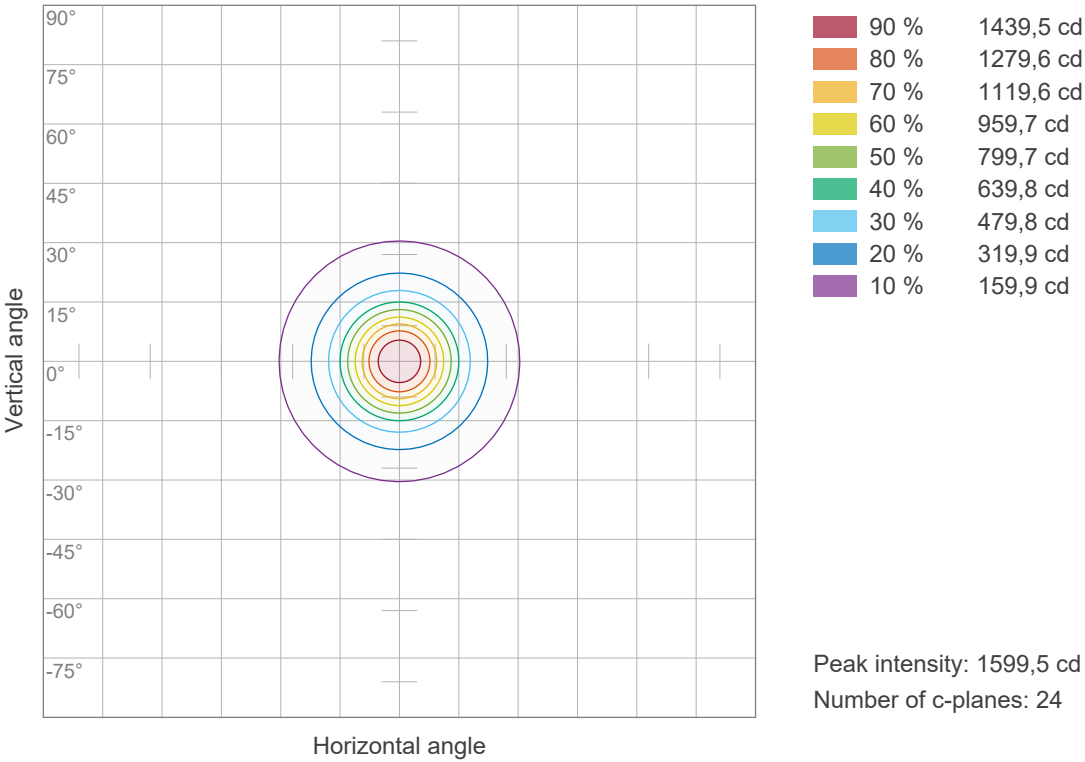

Iso-illuminance Diagram (Iso-lux)

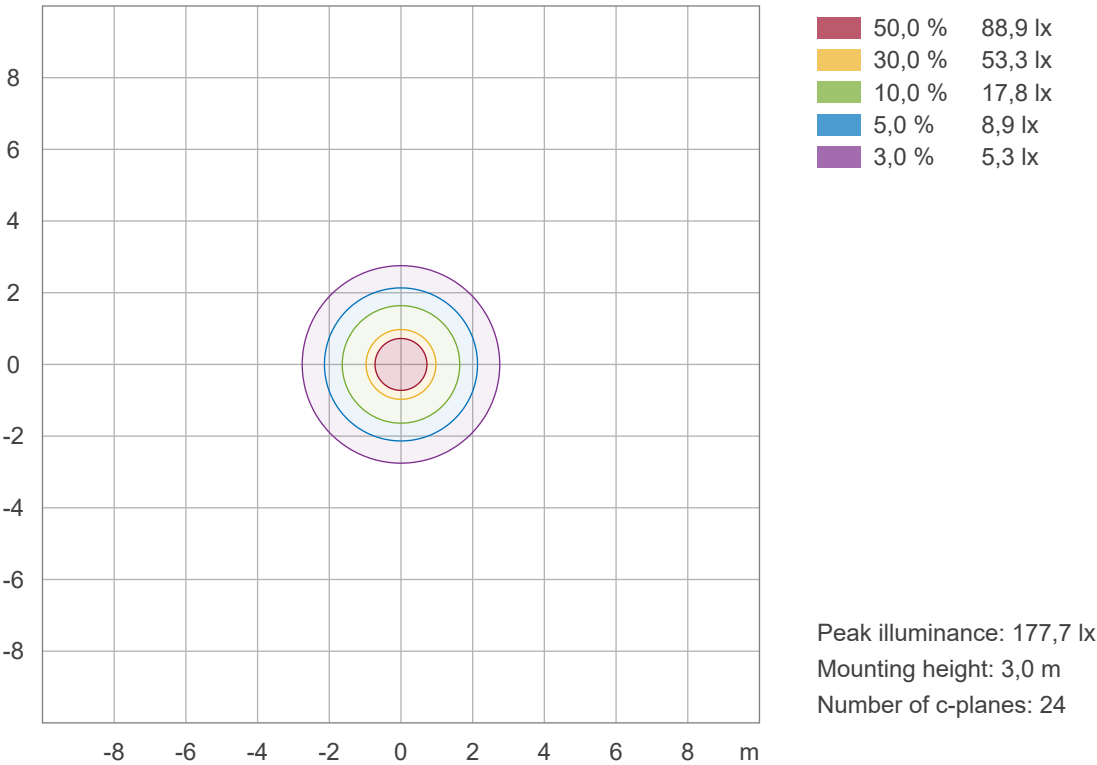

Light Measurement Report

Print date: 7-1-2025

Measurement date and time: 7-1-2025 14:27:19 – Measurement no. VFR-250107-2758-MS

Measurement tracking No. and Link: [VT250107-005744](https://vfr-250107-2758-MS)

Operator:




Color details


Correlated Color Temperature, Target CCT = 2700 K
Correlated Color Temperature, Measured CCT = 2757 K
Color Rendering Index CRI 83,1
Color Rendering Index, R9 (red component) R9 = 6,6
Color Rendering TM30-18 R_f 86,5 – R_g 94,8
Color Quality Scale CQS = 83,2

MacAdam Steps
Color coordinates CIE 1931 (x;y) = (0,460;0,411)
Color coordinate CIEs 1960 (u;v) = (0,263;0,352)
Color deviation from BBL Duv = 0,0028
Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,263;0,527)


CIE 1931

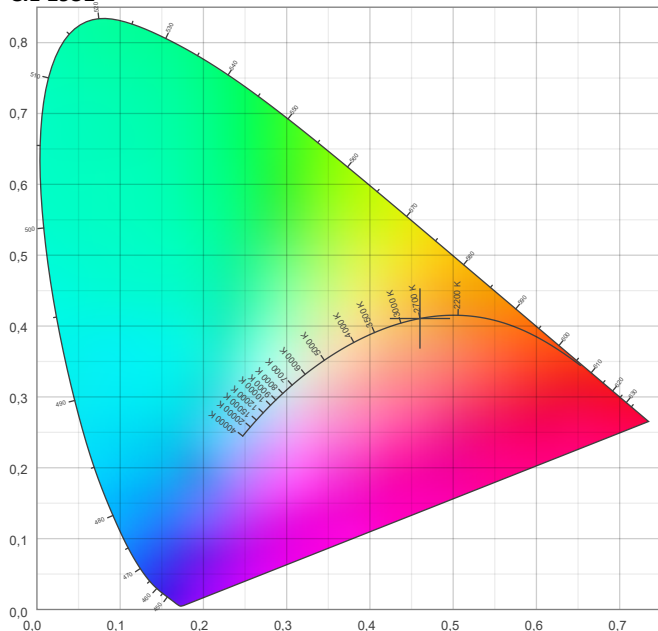

CIE 1931 – zoomed on Planckian locus

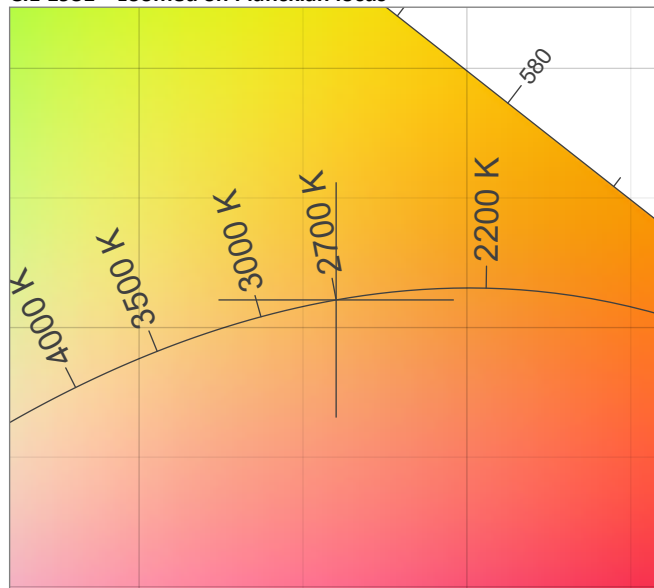


Color Rendering Index per reference color (CIE 1995)

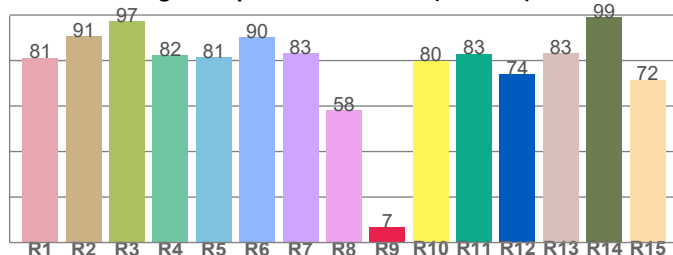


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81,1	90,7	97,2	82,3	81,4	90,3	83,2	58,3	6,6	79,9	83,0	73,9	83,3	99,1	71,6

Spectral power distribution (SPD) / W/nm – 0-100%

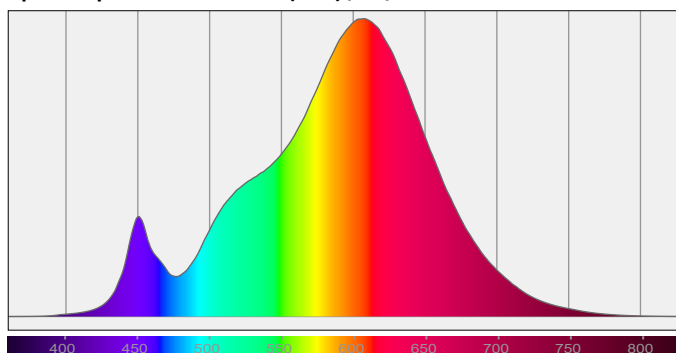


TM30-18 R_f -values per hue bin

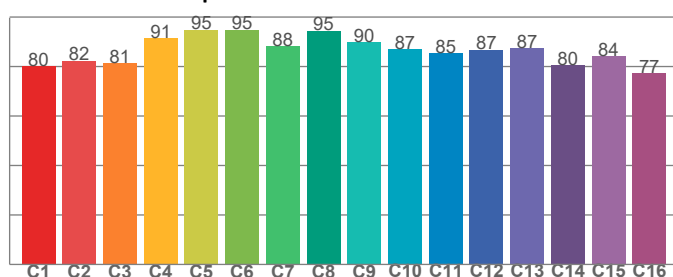

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
80,0	82,3	81,3	91,5	94,9	94,8	88,2	94,5	89,9	86,9	85,4	86,7	87,4	80,5	84,1	77,3

Color Quality Scale by reference color

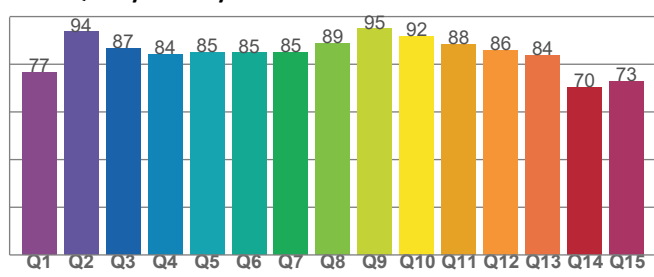

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
76,8	93,6	86,8	84,2	85,0	84,8	85,0	88,8	94,8	91,7	88,5	86,0	83,9	70,5	72,9

Light Measurement Report

Print date: 7-1-2025


Measurement date and time: 7-1-2025 14:27:19 – Measurement no. VFR-250107-2758-MS

Measurement tracking No. and Link: [VT250107-005744](https://vfr-250107-005744)

Operator:



Beam Details

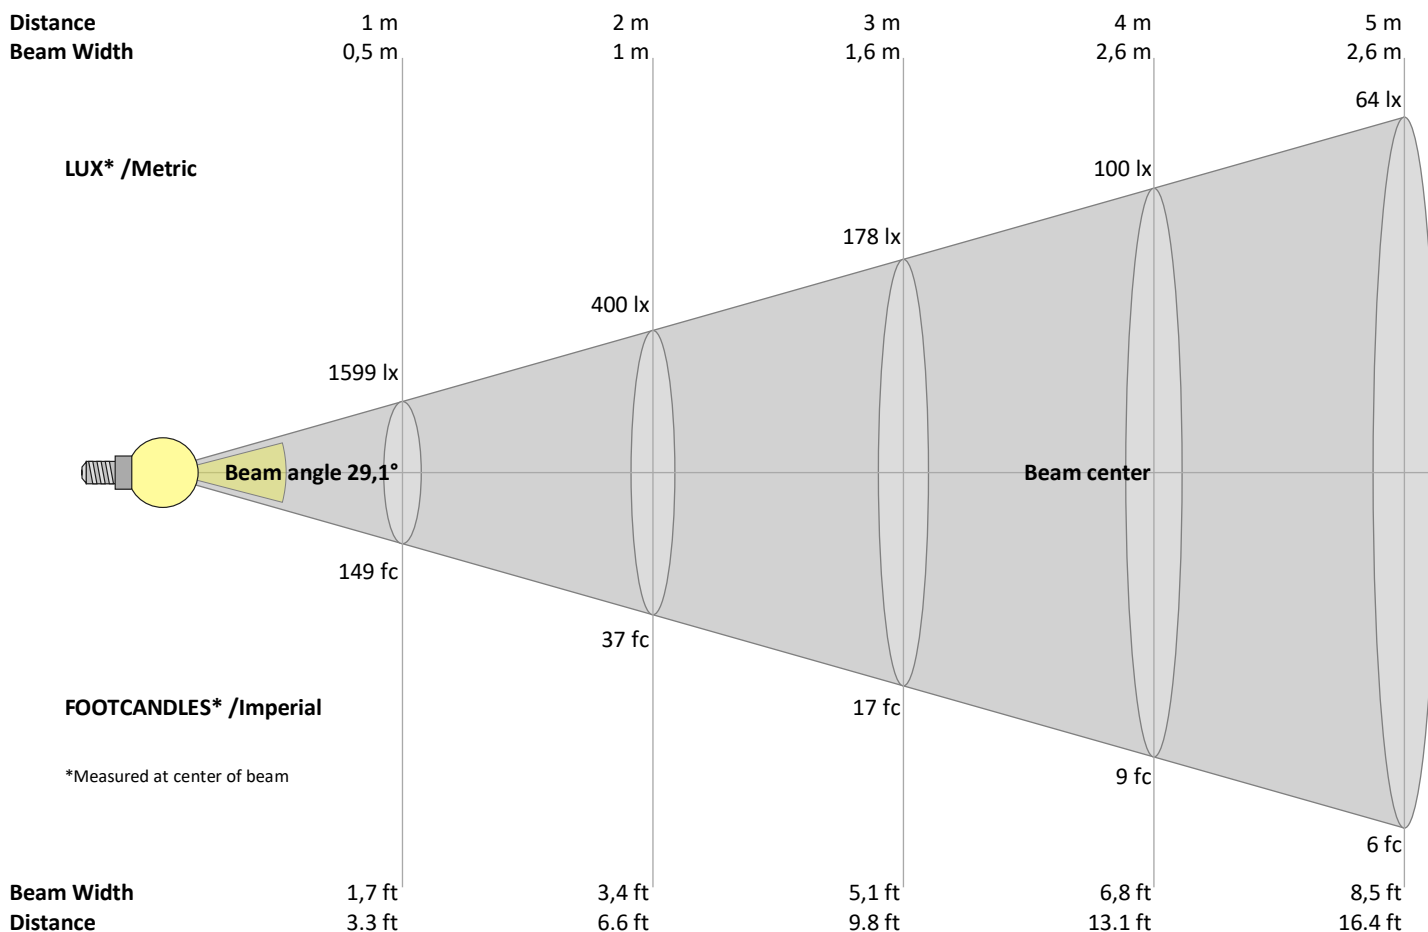

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
1599	400	178	100	64	44	33	25	20	16	13	11	9	8	7	6	6	5	4	4	lux
148,6	37,1	16,5	9,3	5,9	4,1	3	2,3	1,8	1,5	1,2	1	0,9	0,8	0,7	0,6	0,5	0,5	0,4	0,4	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
1599	1599	1529	1437	1326	1159	993	839	690	558	476	393	338	292	248	213	178	158	144	132	cd
100%	100%	96%	90%	83%	72%	62%	52%	43%	35%	30%	25%	21%	18%	16%	13%	11%	10%	9%	8%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
1599	1599	1529	1437	1326	1159	993	839	690	558	476	393	338	292	248	213	178	158	144	132	cd
100%	100%	96%	90%	83%	72%	62%	52%	43%	35%	30%	25%	21%	18%	16%	13%	11%	10%	9%	8%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
1599	1599	1529	1437	1326	1159	993	839	690	558	476	393	338	292	248	213	178	158	144	132	cd
100%	100%	96%	90%	83%	72%	62%	52%	43%	35%	30%	25%	21%	18%	16%	13%	11%	10%	9%	8%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
1599	1599	1529	1437	1326	1159	993	839	690	558	476	393	338	292	248	213	178	158	144	132	cd
100%	100%	96%	90%	83%	72%	62%	52%	43%	35%	30%	25%	21%	18%	16%	13%	11%	10%	9%	8%	of 0°val

Light Measurement Report

Print date: 7-1-2025

Measurement date and time: 7-1-2025 14:27:19 – Measurement no. VFR-250107-2758-MS

Measurement tracking No. and Link: [VT250107-005744](#)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances											
	p Ceiling	70	70	50	50	30	70	70	50	50	30
	p Walls	50	30	50	30	30	50	30	50	30	30
	p Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	23,1	23,9	23,2	24,1	24,3	23,1	23,9	23,2	24,1	24,3
	3H	23,2	24,1	23,6	24,4	24,6	23,2	24,1	23,6	24,4	24,6
	4H	23,2	24,1	23,6	24,3	24,5	23,2	24,1	23,6	24,3	24,5
	6H	23,2	23,9	23,5	24,2	24,6	23,2	23,9	23,5	24,2	24,6
	8H	23,2	23,9	23,5	24,2	24,6	23,2	23,9	23,5	24,2	24,6
	12H	23,1	23,8	23,5	24,1	24,6	23,1	23,8	23,5	24,1	24,6
4H	2H	23,3	24,2	23,7	24,4	24,6	23,3	24,2	23,7	24,4	24,6
	3H	23,7	24,3	24,0	24,7	25,1	23,7	24,3	24,0	24,7	25,1
	4H	23,5	24,2	24,0	24,6	25,1	23,5	24,2	24,0	24,6	25,1
	6H	23,5	24,1	24,0	24,4	24,8	23,5	24,1	24,0	24,4	24,8
	8H	23,4	24,0	23,9	24,3	24,7	23,4	24,0	23,9	24,3	24,7
	12H	23,4	23,8	23,9	24,2	24,7	23,4	23,8	23,9	24,2	24,7
8H	4H	23,4	24,0	24,0	24,4	24,7	23,4	24,0	24,0	24,4	24,7
	6H	23,4	23,8	23,9	24,2	24,8	23,4	23,8	23,9	24,2	24,8
	8H	23,4	23,7	23,9	24,2	24,9	23,4	23,7	23,9	24,2	24,9
	12H	23,3	23,6	23,9	24,1	24,7	23,3	23,6	23,9	24,1	24,7
12H	4H	23,4	23,8	23,9	24,3	24,7	23,4	23,8	23,9	24,3	24,7
	6H	23,4	23,7	23,9	24,2	24,9	23,4	23,7	23,9	24,2	24,9
	8H	23,3	23,6	23,9	24,1	24,7	23,3	23,6	23,9	24,1	24,7
Variations with the observer position for the luminaire spacings, S:											
S = 1.0H		0,3 / -0,2					0,3 / -0,2				
S = 1.5H		1,0 / -1,5					1,0 / -1,5				
S = 2.0H		2,3 / -5,2					2,3 / -5,2				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR		(RCR: Room Cavity Ratio)			Room Values are expressed as percentage of Lumen delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	89	87	85	83
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60
7	80	70	63	59	78	69	63	58	68	62	58	66	61	58	65	61	57	56
8	76	66	59	55	75	65	59	55	64	58	55	63	58	54	62	57	54	53
9	73	62	56	52	71	62	56	52	61	55	52	60	55	51	59	54	51	50
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47

Light Measurement Report


Print date: 7-1-2025
Measurement date and time: 7-1-2025 14:27:19 – Measurement no. VFR-250107-2758-MS
Measurement tracking No. and Link: [VT250107-005744](#)
Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

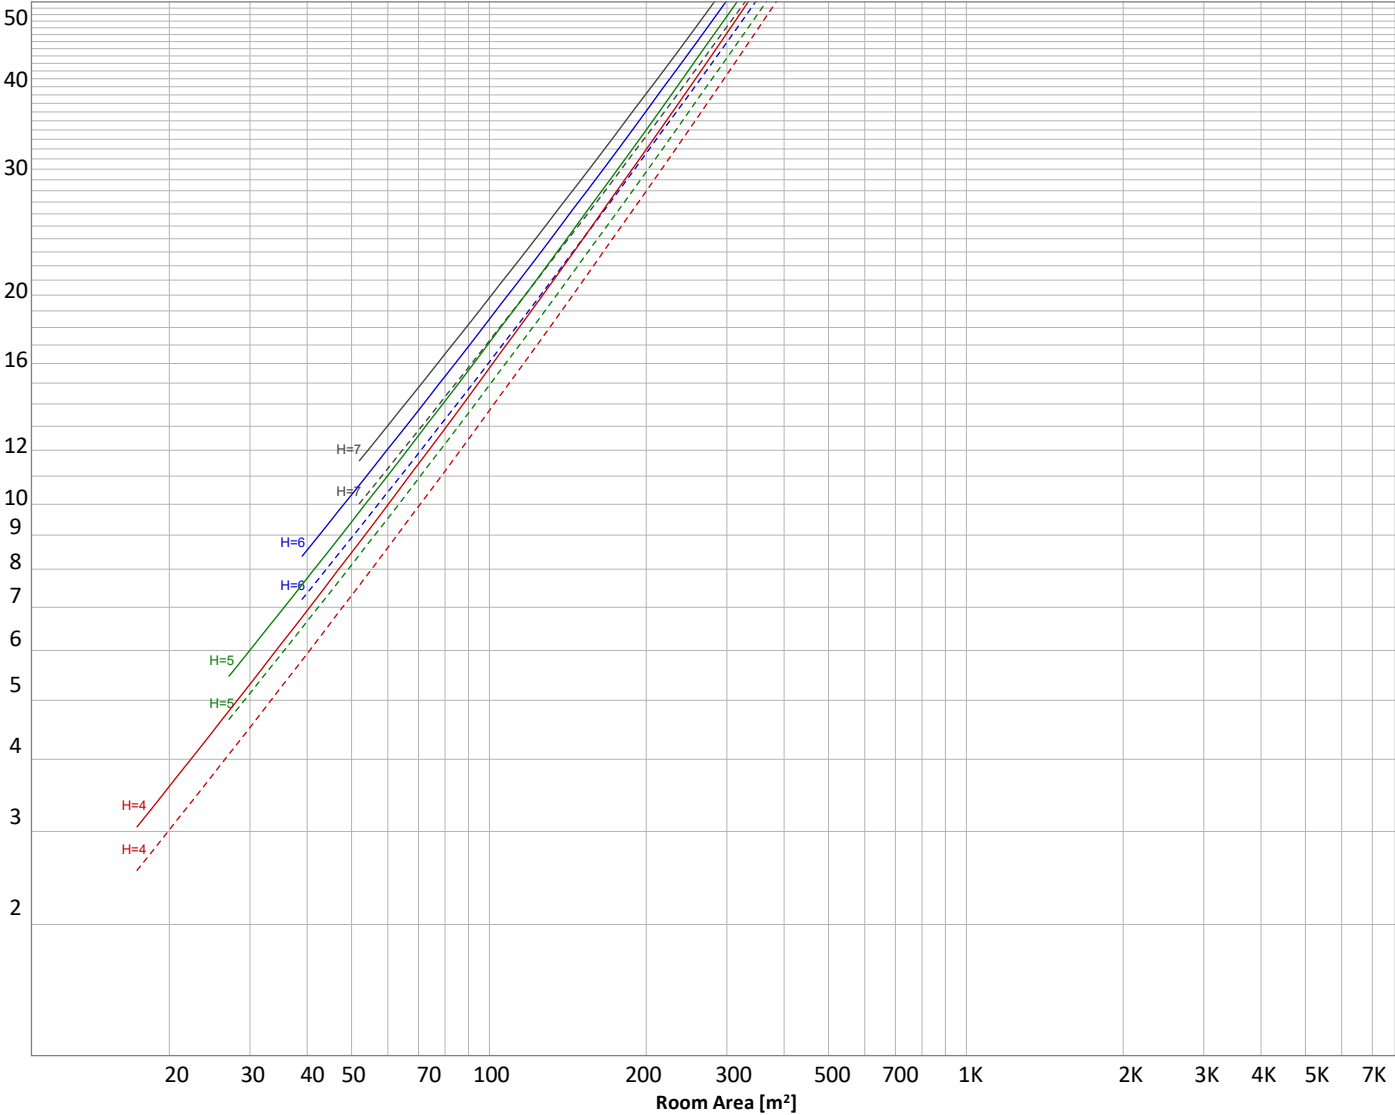

Conditions

H = Room height	Flux = 812 lm	p(%)		
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50
E _{work} = Average lux on work area =	100 lx	-----	50	30
				Floor reflectance
				20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
136 lm	208 lm	143 lm	94,3 lm	93,4 lm	89,9 lm	41,5 lm	4,05 lm	0,157 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,145 lm	0,138 lm	0,105 lm	0,130 lm	0,108 lm	0,097 lm	0,085 lm	0,071 lm	0,022 lm

Light Measurement Report

Print date: 7-1-2025

Measurement date and time: 7-1-2025 14:27:19 – Measurement no. VFR-250107-2758-MS

Measurement tracking No. and Link: [VT250107-005744](#)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	136 lm	16,8%
10-20°	208 lm	25,7%
20-30°	143 lm	17,6%
30-40°	94 lm	11,6%
40-50°	93 lm	11,5%
50-60°	90 lm	11,1%
60-70°	42 lm	5,1%
70-80°	4 lm	0,5%
80-90°	0 lm	0,0%
90-100°	0 lm	0,0%
100-110°	0 lm	0,0%
110-120°	0 lm	0,0%
120-130°	0 lm	0,0%
130-140°	0 lm	0,0%
140-150°	0 lm	0,0%
150-160°	0 lm	0,0%
160-170°	0 lm	0,0%
170-180°	0 lm	0,0%
Total	812 lm	100,0%

Intensity peaks

Max intensity	1599 cd
Intensity, 90°	0 cd
Intensity, 0°	1599 cd

Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	487 lm	60,1%
0-40°	582 lm	71,7%
0-60°	765 lm	94,3%
60-90°	46 lm	5,6%
70-100°	4 lm	0,5%
90-120°	0 lm	0,0%
0-90°	811 lm	99,9%
90-180°	1 lm	0,1%
0-180°	812 lm	100,0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	243 lm	29,9%
Medium(30-60°)	139 lm	17,1%
High(60-80°)	24 lm	2,9%
Very high(80-90°)	0 lm	0,0%
Back light		
Low(0-30°)	243 lm	29,9%
Medium(30-60°)	139 lm	17,1%
High(60-80°)	24 lm	2,9%
Very high(80-90°)	0 lm	0,0%
Uplight		
Low(90-100°)	0 lm	0,0%
High(100-180°)	1 lm	0,1%

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U1 G0

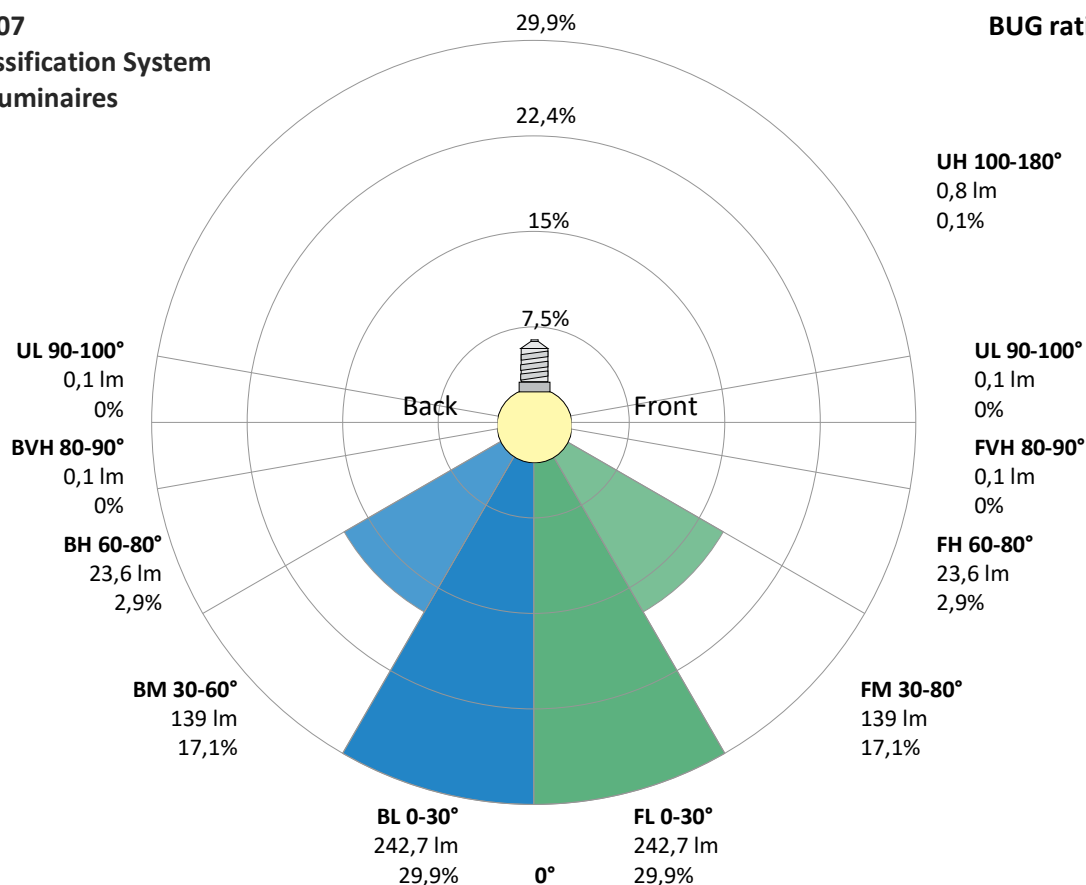

Light Measurement Report

Print date: 7-1-2025

Measurement date and time: 7-1-2025 14:27:19 – Measurement no. VFR-250107-2758-MS

Measurement tracking No. and Link: [VT250107-005744](#)

Operator:




Power Details

Input Power

Power feed to light source	10,7 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	230 V
RMS Input current feed, I_{RMS}	0,050 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	11,61 VA
Displacement factor of AC power feed	1,0
Power factor of AC current feed	0,92
Total harmonic distortion of the current	42,27%
Total harmonic distortion of the voltage	0,12%

Input Power Curve

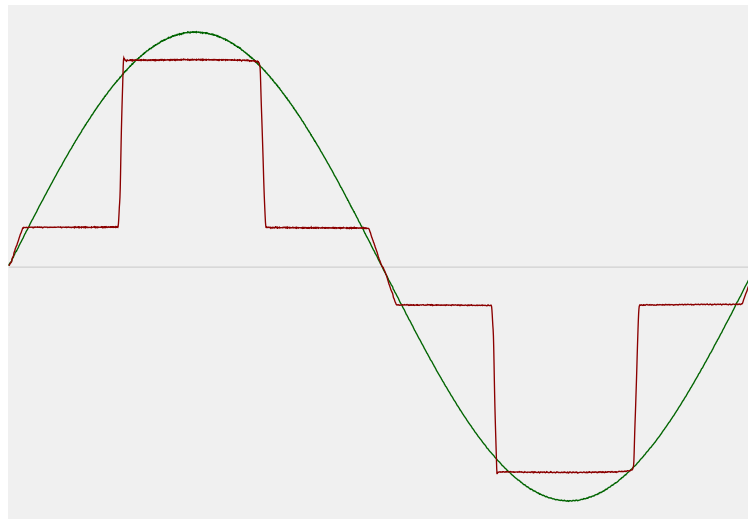

Efficiency

Radiated power efficiency 23,0%



Lumen efficiency 76 lm/W



Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	2698 K
CCT shift	+2 K
CCT end	2700 K


Warmup Result

Total warmup time	Lamp stabilized in 15 min 2 sec
Warmup variation	-0,3%

Output Change

Output start	814 lm
Output change	-2 lm
Output end	812 lm

Stabilization Curve

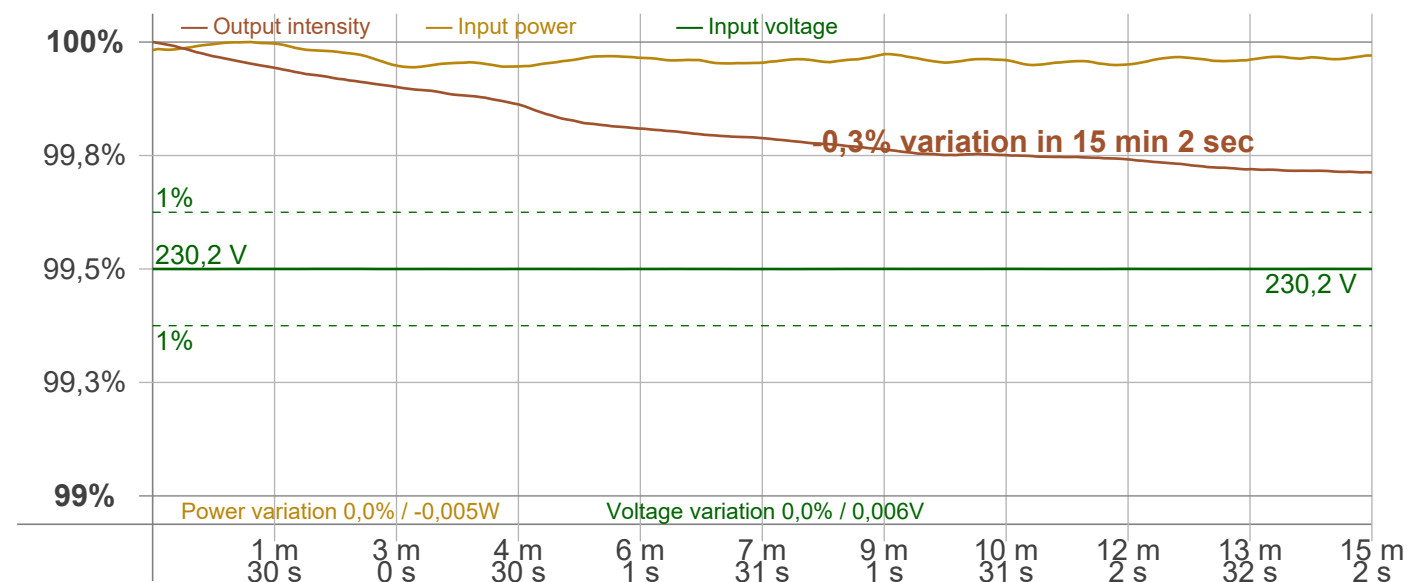

Light Measurement Report

Print date: 7-1-2025
Measurement date and time: 7-1-2025 14:27:19 – Measurement no. VFR-250107-2758-MS
Measurement tracking No. and Link: [VT250107-005744](#)
Operator:



Flicker /TLA details

Flicker Meter Type Viso Systems LabFlicker
Frequency of input power 50 Hz
Flicker/TLA sample rate 20000 samples/s

Measurement time
PstLM 180 sec
All other indices 1,2 sec


Flicker indices according to Illuminating Engineering Society (IES)
Flicker frequency 100 Hz
Percent Flicker 5,83 %
Flicker index 0,01

Flicker indices according to California Energy Commission (CEC) 2016b
JA8/10 40 Hz 0,08 %
JA8/10 90 Hz 0,09 %
JA8/10 200 Hz 3,07 %
JA8/10 400 Hz 4,64 %
JA8/10 1000 Hz 5,65 %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)
PstLM value (F < 80 Hz) 0,15
SVM value (80 < F < 2000 Hz) 0,11

Flicker indices according to Lighting Research Center (2015)
Perception metric, Assist Mp 0,06

Flicker frame (frame of one flicker period in time domain)

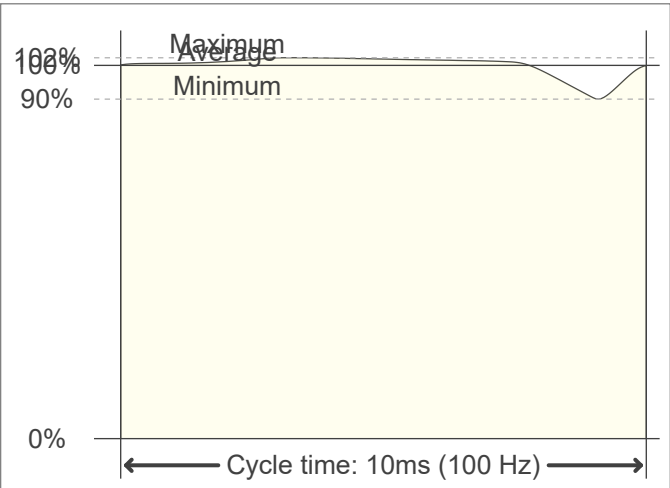

Flicker FFT (flicker curve in frequency domain)

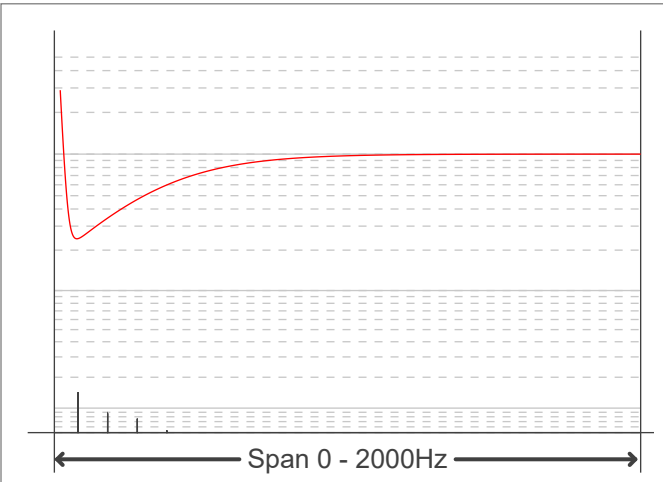

IEEE 1789 Frequency/modulation plot

