

Light Measurement Report

Print date: 31-10-2025

Measurement date and time: 31-10-2025 08:32:33 – Measurement no. VFR-251031-3835-MS

Measurement tracking No. and Link: [VT251031-003988](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location
Goniospectrometer System and Type
Sensor Name, Calibr. Date and Serial No.
Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark
LabSpion – Type C, horizontal
LabSensor Model2 – 11-1-2024 – 3130191315
Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution
 γ (gamma)-Resolution
Test Distance
Input Power, Power and Displ. Factors
Input RMS Voltage and Current
Frequency of Input Power
Warm-up Time and Variation

12 planes – 30°
5°
12,09 m
39,4 W – PF 0,95 – DPF 0,96
230 V – 0,180 A
50 Hz
Lamp stabilized in 15 min 1 sec – 2,0%

Tested Light Source



Product Name
Item No. and Manufacturer
Product Description (line 1)
35W/40W/45W/55W | ZWART | CCT SWITCH

812973-4000K-40W
812973-4000K-40W – Dutchfulfillment
3-FASE RAILARMATUUR | TARVOS | KANTELBAAR | 150CM |

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity and Beam Angle
Correlated Color Temperature, Target/Measured
Color Rendering Index
Color Rendering TM30-18
Color Shift, CIE duv and MacAdam Steps
Flicker

5909 lm – 4,38% / 95,62%
150 lm/W
2394 cd – 91,5°
CCT = 4000 K / 3773 K
CRI 83,2
 R_f 83,9 – R_g 98,9
Duv 0,0054 – SDCM 7,9
SVM 0,01 – PstLM 0,02

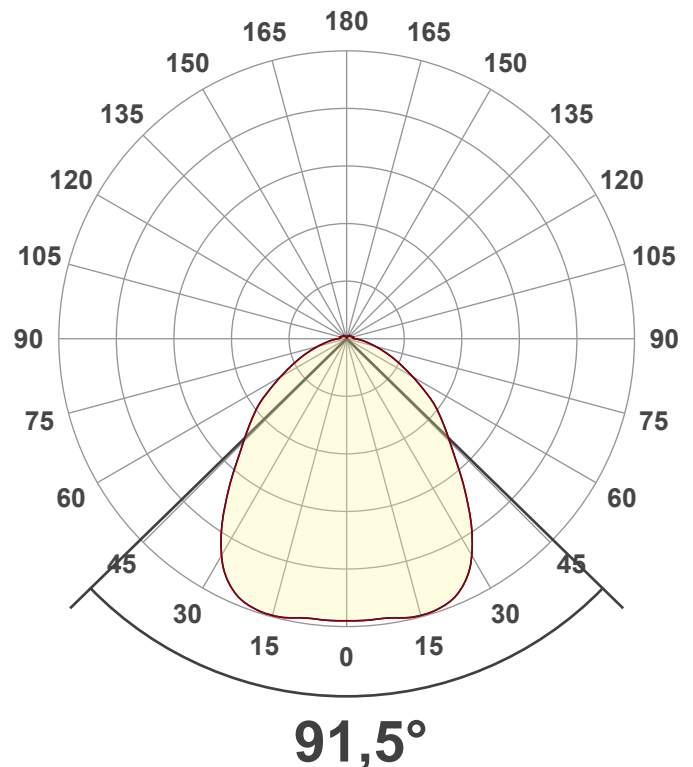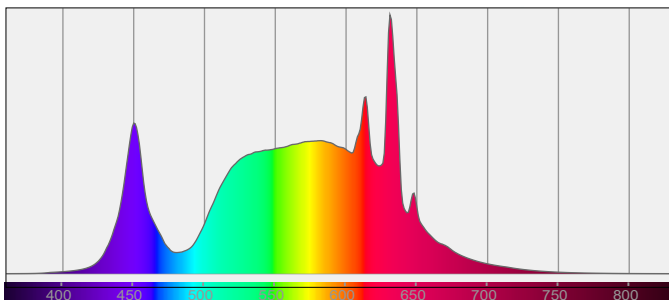

Light Measurement Report

Print date: 31-10-2025

Measurement date and time: 31-10-2025 08:32:33 – Measurement no. VFR-251031-3835-MS


Measurement tracking No. and Link: [VT251031-003988](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

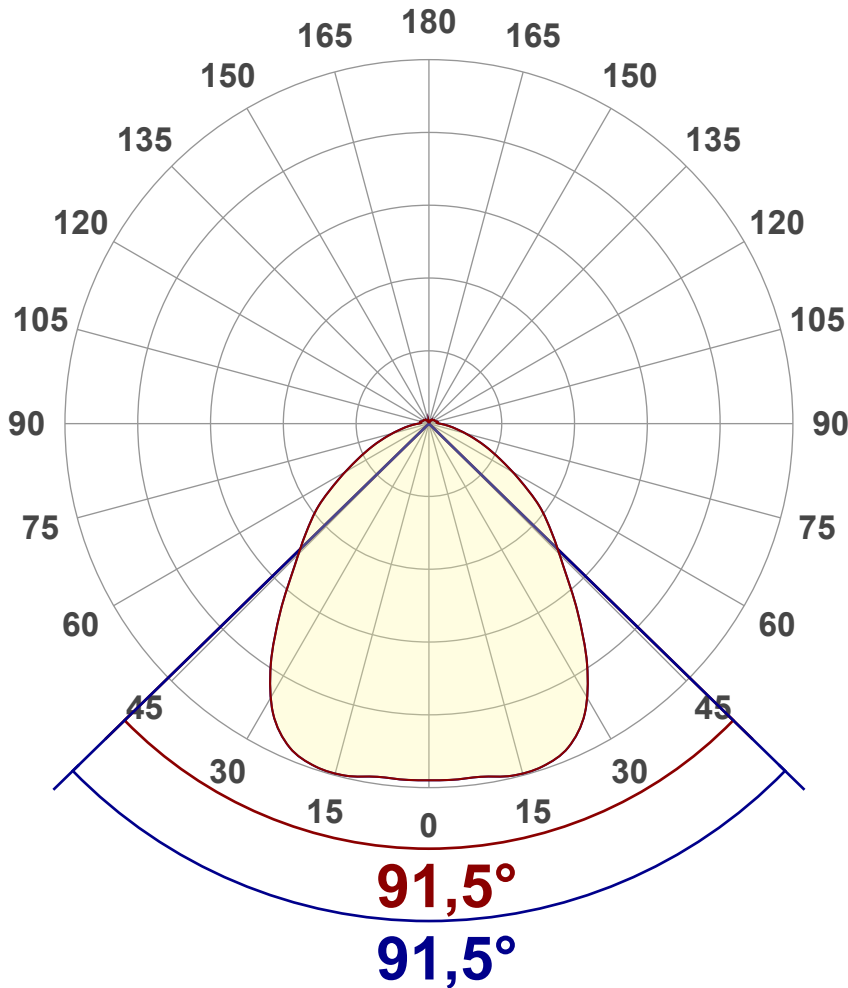

Main Values

Output (total Lumen)	5909 lm
Lumen Up% / Down%	4,38% / 95,62%
Peak Intensity	2394 cd
Beam Angle (50%)	91,5°
Beam Angle (90%)	91,5°
Beam Angle (10%)	91,5°

Cut-off Angle

Average 2,5%	184,8°
--------------	--------

Field Angle

Average 10%	151,6°
-------------	--------


Intensity Ratio

In 120° cone	80,7%
In 90° cone	60,4%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ -angle

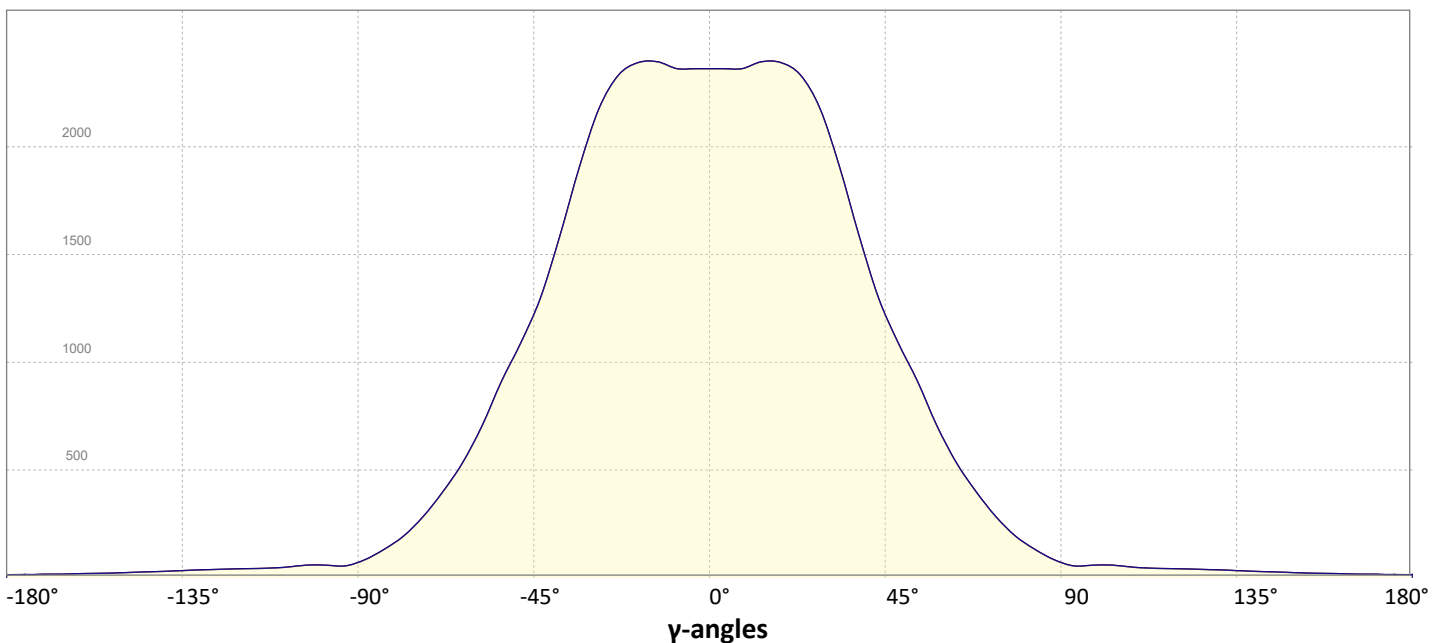

Light Measurement Report

Print date: 31-10-2025


Measurement date and time: 31-10-2025 08:32:33 – Measurement no. VFR-251031-3835-MS

Measurement tracking No. and Link: [VT251031-003988](#)

Operator:



Iso-intensity Diagram (Iso-candela)

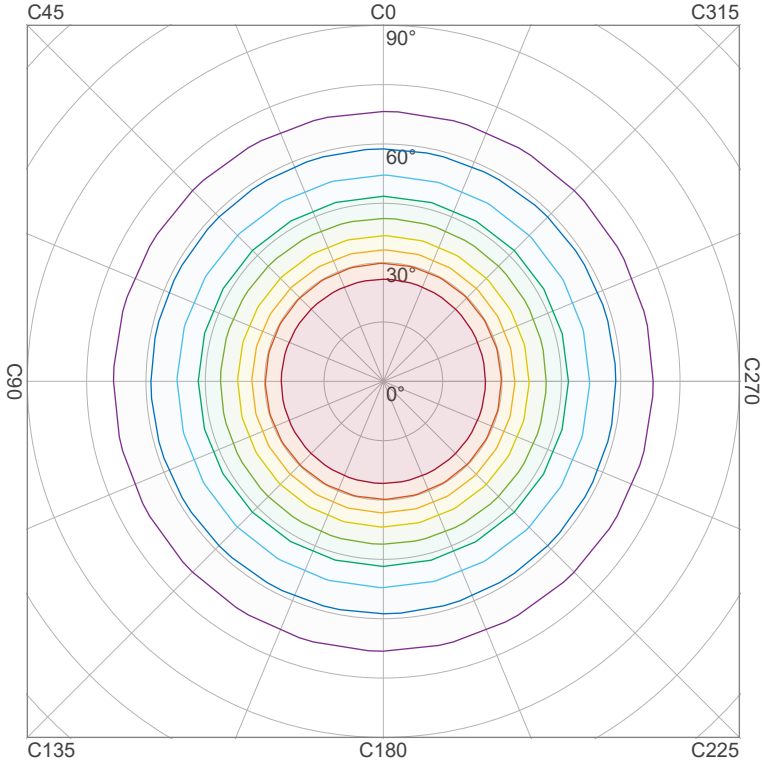


90 %	2154,5 cd
80 %	1915,1 cd
70 %	1675,8 cd
60 %	1436,4 cd
50 %	1197,0 cd
40 %	957,6 cd
30 %	718,2 cd
20 %	478,8 cd
10 %	239,4 cd

Peak intensity: 2393,9 cd

Number of c-planes: 12

Iso-illuminance Diagram (Iso-lux)

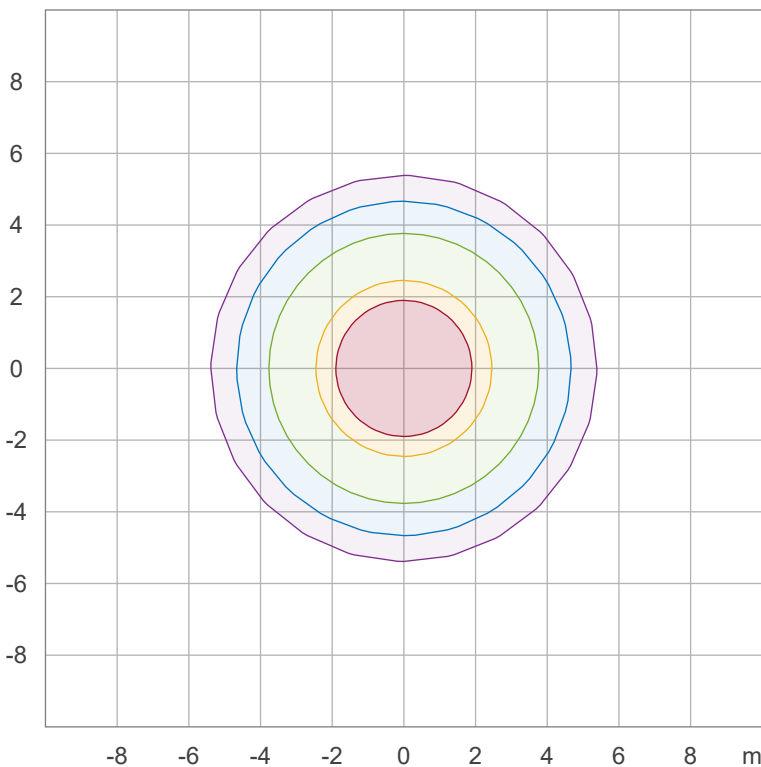

50,0 %	131,2 lx
30,0 %	78,7 lx
10,0 %	26,2 lx
5,0 %	13,1 lx
3,0 %	7,9 lx

Peak illuminance: 262,5 lx

Mounting height: 3,0 m

Number of c-planes: 12

Light Measurement Report

Print date: 31-10-2025

Measurement date and time: 31-10-2025 08:32:33 – Measurement no. VFR-251031-3835-MS

Measurement tracking No. and Link: [VT251031-003988](https://www.viso-systems.com/VT251031-003988)

Operator:



Color details

Correlated Color Temperature, Target CCT = 4000 K
 Correlated Color Temperature, Measured CCT = 3773 K
 Color Rendering Index CRI 83,2
 Color Rendering Index, R9 (red component) R9 = 31,7
 Color Rendering TM30-18 Rf 83,9 – Rg 98,9
 Color Quality Scale CQS = 84,1

MacAdam Steps SDCM = 7,9
 Color coordinates CIE 1931 (x;y) = (0,381;0,377)
 Color coordinate CIEs 1960 (u;v) = (0,225;0,334)
 Color deviation from BBL Duv = 0,0054
 Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,225;0,502)


CIE 1931



CIE 1931 – zoomed on Planckian locus




Color Rendering Index per reference color (CIE 1995)

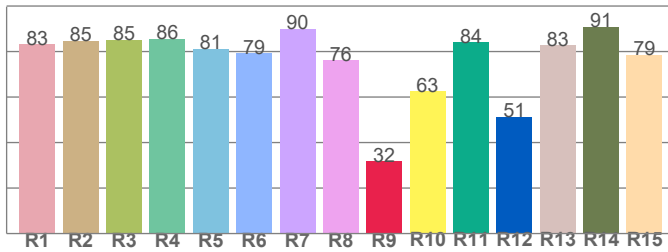


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
83,3	84,8	85,1	85,6	81,2	79,2	90,0	76,1	31,7	62,7	84,1	51,3	82,7	90,8	78,5

Spectral power distribution (SPD) / W/nm – 0-100%

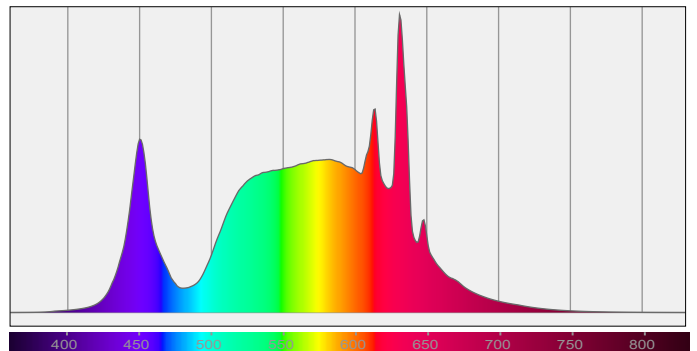


TM30-18 Rf-values per hue bin

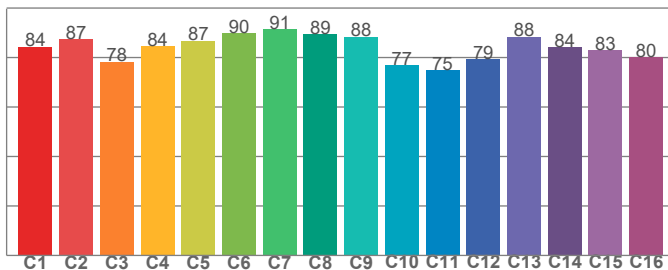

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
84,3	87,4	78,2	84,5	86,7	89,8	91,5	89,3	88,5	77,0	74,8	79,4	88,4	84,0	82,9	80,0

Color Quality Scale by reference color

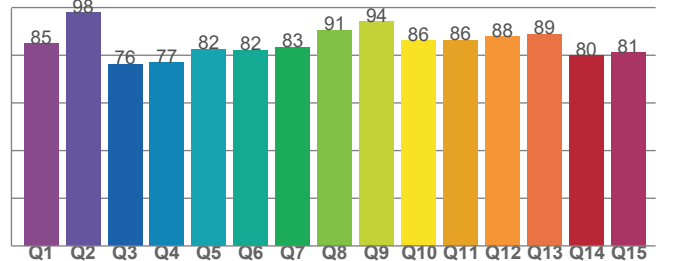

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
84,9	97,9	76,2	76,8	82,5	82,1	83,5	90,6	94,1	86,1	86,3	87,7	88,8	79,9	81,1

Light Measurement Report

Print date: 31-10-2025


Measurement date and time: 31-10-2025 08:32:33 – Measurement no. VFR-251031-3835-MS

Measurement tracking No. and Link: [VT251031-003988](https://www.viso-systems.com/VT251031-003988)

Operator:



Beam Details

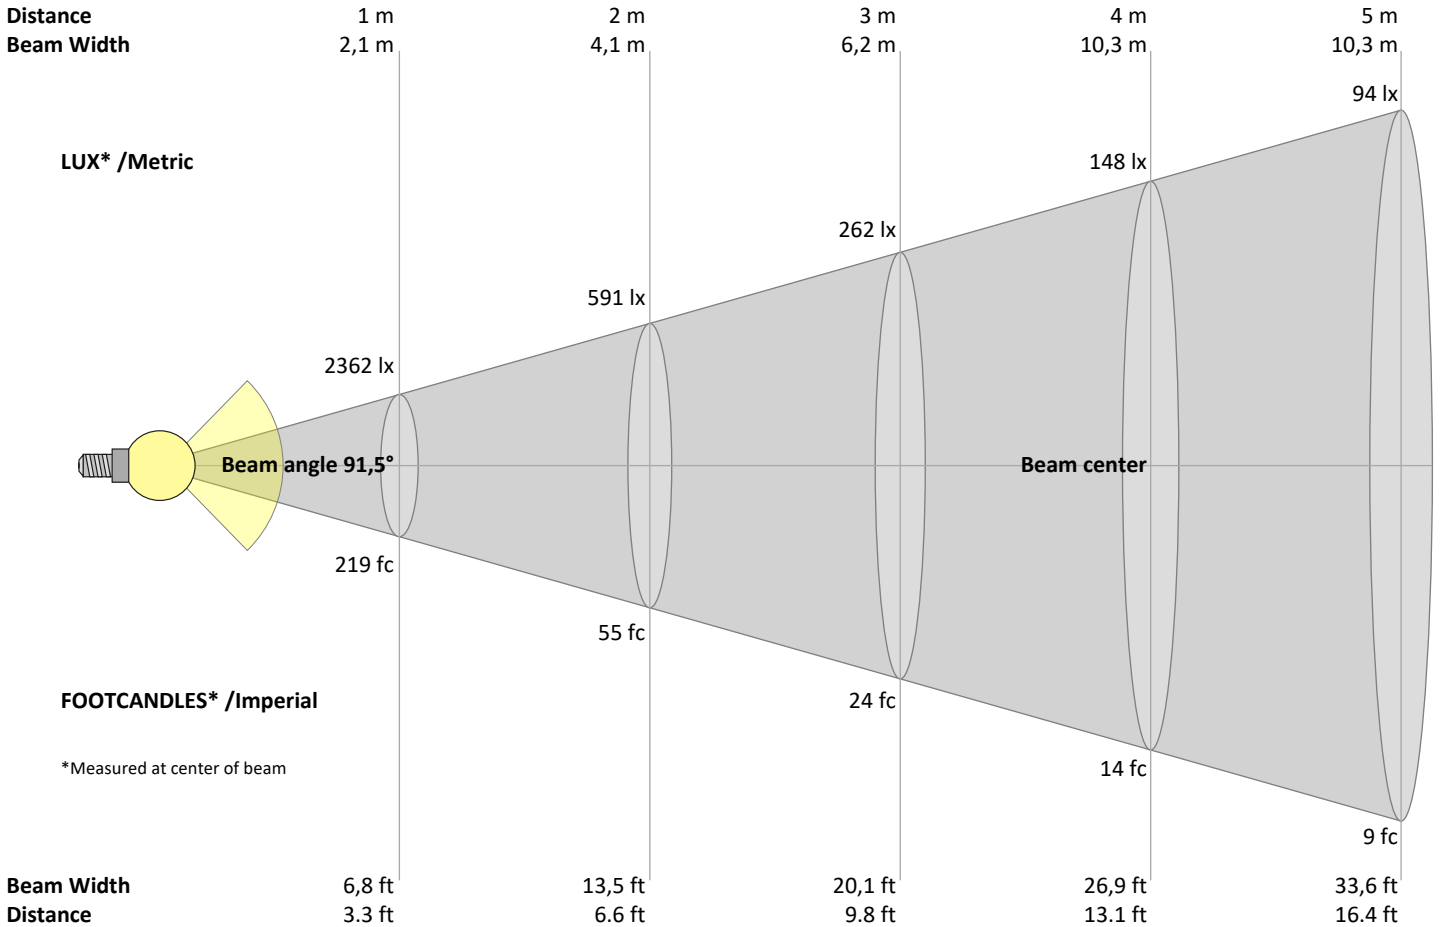

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
2362	591	262	148	94	66	48	37	29	24	20	16	14	12	10	9	8	7	7	6	lux
219,5	54,9	24,4	13,7	8,8	6,1	4,5	3,4	2,7	2,2	1,8	1,5	1,3	1,1	1	0,9	0,8	0,7	0,6	0,5	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
2362	2362	2373	2393	2371	2280	2085	1798	1489	1227	1029	840	645	486	360	254	173	115	74	56	cd
100%	100%	100%	101%	100%	97%	88%	76%	63%	52%	44%	36%	27%	21%	15%	11%	7%	5%	3%	2%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
2362	2362	2373	2393	2371	2280	2085	1798	1489	1227	1029	840	645	486	360	254	173	115	74	56	cd
100%	100%	100%	101%	100%	97%	88%	76%	63%	52%	44%	36%	27%	21%	15%	11%	7%	5%	3%	2%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
2362	2362	2373	2393	2371	2280	2085	1798	1489	1227	1029	840	645	486	360	254	173	115	74	56	cd
100%	100%	100%	101%	100%	97%	88%	76%	63%	52%	44%	36%	27%	21%	15%	11%	7%	5%	3%	2%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
2362	2362	2373	2393	2371	2280	2085	1798	1489	1227	1029	840	645	486	360	254	173	115	74	56	cd
100%	100%	100%	101%	100%	97%	88%	76%	63%	52%	44%	36%	27%	21%	15%	11%	7%	5%	3%	2%	of 0°val

Light Measurement Report

Print date: 31-10-2025

Measurement date and time: 31-10-2025 08:32:33 – Measurement no. VFR-251031-3835-MS

Measurement tracking No. and Link: [VT251031-003988](https://www.viso-systems.com/VT251031-003988)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	22,1	23,2	22,4	23,6	23,9	22,4	23,5	22,7	23,9	24,2
	3H	23,0	24,1	23,5	24,5	24,7	23,4	24,5	23,9	24,8	25,1
	4H	23,4	24,4	23,9	24,8	25,1	23,9	24,9	24,3	25,3	25,6
	6H	23,8	24,7	24,1	25,0	25,5	24,3	25,3	24,7	25,6	26,1
	8H	23,9	24,8	24,3	25,2	25,6	24,5	25,4	24,9	25,8	26,3
	12H	24,0	24,9	24,4	25,3	25,8	24,7	25,6	25,1	26,0	26,5
4H	2H	22,5	23,6	23,0	23,9	24,2	22,7	23,8	23,2	24,1	24,5
	3H	23,7	24,6	24,1	25,0	25,5	24,0	24,9	24,5	25,3	25,8
	4H	24,1	25,0	24,6	25,4	26,0	24,5	25,4	25,1	25,8	26,4
	6H	24,6	25,3	25,1	25,8	26,2	25,1	25,9	25,6	26,3	26,7
	8H	24,7	25,4	25,3	25,9	26,3	25,4	26,1	25,9	26,5	27,0
	12H	24,9	25,5	25,5	26,0	26,5	25,6	26,2	26,2	26,7	27,2
8H	4H	24,3	25,0	24,9	25,5	25,9	24,7	25,4	25,3	25,9	26,3
	6H	24,9	25,5	25,5	26,0	26,6	25,4	25,9	26,0	26,5	27,1
	8H	25,2	25,7	25,8	26,3	27,0	25,8	26,3	26,4	26,8	27,5
	12H	25,5	25,9	26,1	26,4	27,1	26,2	26,6	26,8	27,2	27,8
12H	4H	24,3	24,9	24,9	25,4	26,0	24,7	25,3	25,3	25,8	26,3
	6H	25,0	25,5	25,6	26,1	26,8	25,5	25,9	26,1	26,5	27,2
	8H	25,3	25,7	26,0	26,3	27,0	25,9	26,3	26,5	26,8	27,5

Variations with the observer position for the luminaire spacings, S:

S = 1.0H	0,1 / -0,2	0,1 / -0,2
S = 1.5H	0,3 / -0,5	0,2 / -0,4
S = 2.0H	0,7 / -0,9	0,6 / -0,8

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	118	118	118	118	115	115	115	115	109	109	109	103	103	103	98	98	98	96
1	109	104	100	97	105	101	98	95	96	94	91	92	89	87	88	86	84	82
2	100	92	86	81	97	90	84	79	86	81	77	82	78	74	78	75	72	70
3	92	82	74	68	89	80	73	67	76	71	66	73	68	64	70	66	63	60
4	84	73	65	59	82	72	64	58	69	62	57	66	60	56	63	59	55	53
5	78	66	58	52	76	65	57	51	62	55	50	60	54	49	58	52	48	46
6	72	60	52	46	70	59	51	45	57	50	44	55	48	44	53	47	43	41
7	67	55	46	41	66	54	46	40	52	45	40	50	44	39	48	43	39	37
8	63	50	42	37	61	49	42	36	48	41	36	46	40	35	45	39	35	33
9	59	46	38	33	57	45	38	33	44	37	33	43	37	32	41	36	32	30
10	55	43	35	30	54	42	35	30	41	34	30	40	34	29	39	33	29	27

Light Measurement Report

Print date: 31-10-2025

Measurement date and time: 31-10-2025 08:32:33 – Measurement no. VFR-251031-3835-MS

Measurement tracking No. and Link: [VT251031-003988](#)


Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

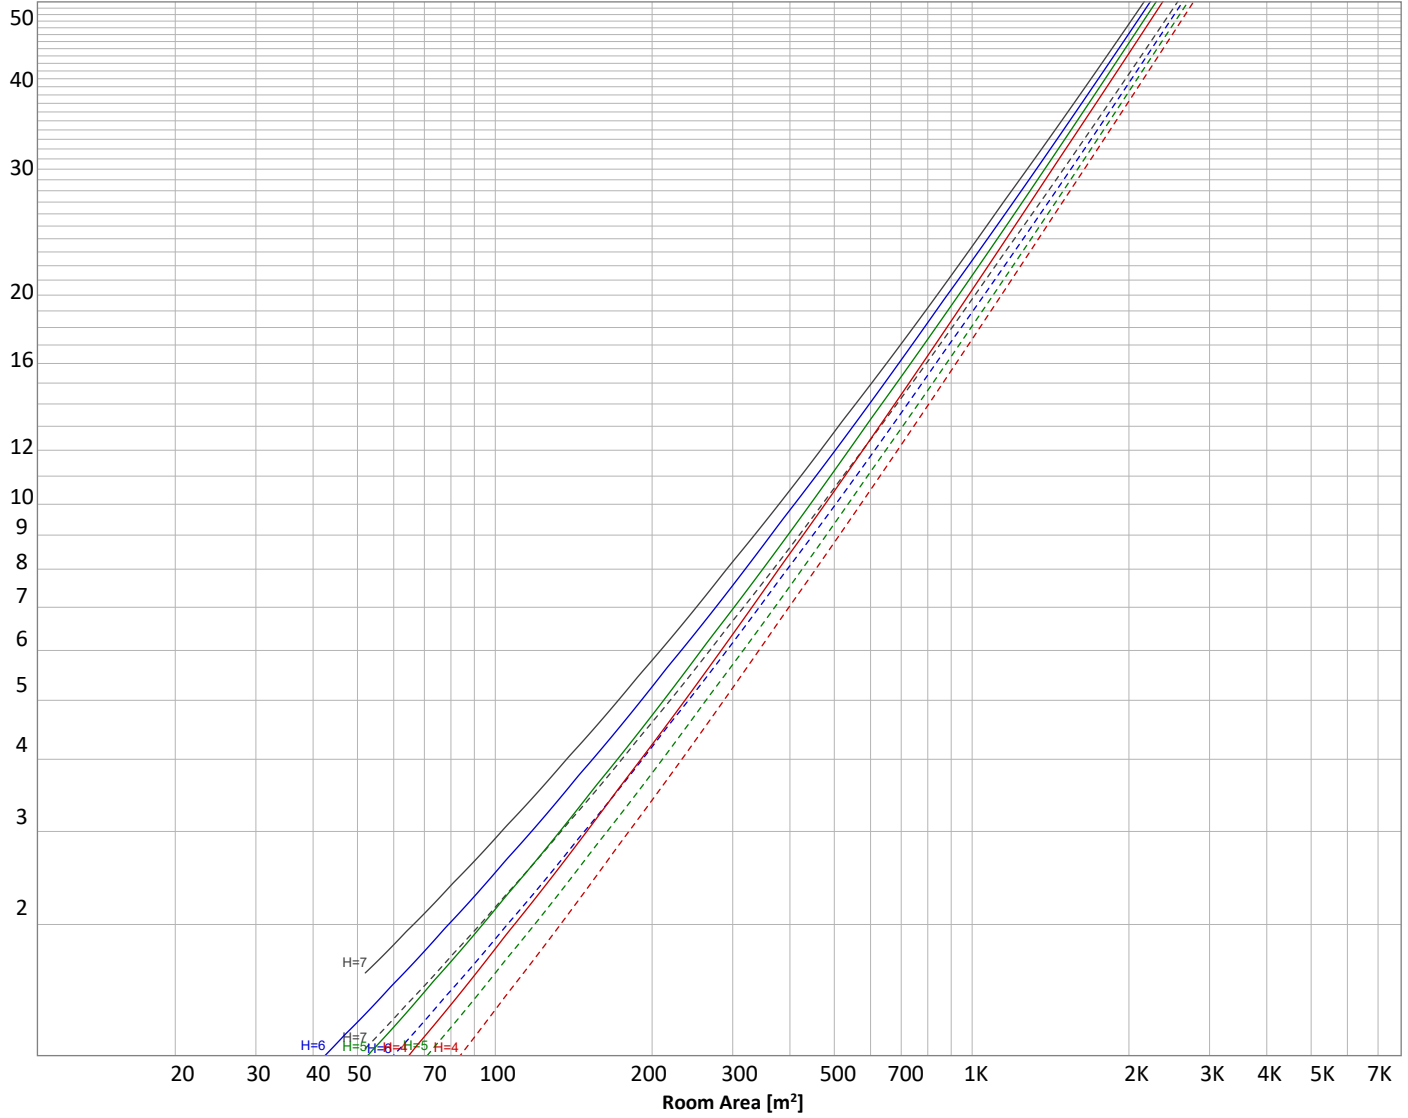

Conditions

H = Room height	Flux = 5909 lm				
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	ρ(%) Wall reflectance	Floor reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50	30
E _{work} = Average lux on work area =	100 lx	—————	50	30	20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
226 lm	678 lm	1048 lm	1119 lm	951 lm	748 lm	484 lm	270 lm	127 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
63,9 lm	57,7 lm	43,4 lm	35,2 lm	25,7 lm	16,8 lm	9,79 lm	5,02 lm	1,47 lm

Light Measurement Report

Print date: 31-10-2025

Measurement date and time: 31-10-2025 08:32:33 – Measurement no. VFR-251031-3835-MS

Measurement tracking No. and Link: [VT251031-003988](#)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	226 lm	3,8%
10-20°	678 lm	11,5%
20-30°	1048 lm	17,7%
30-40°	1119 lm	18,9%
40-50°	951 lm	16,1%
50-60°	748 lm	12,7%
60-70°	484 lm	8,2%
70-80°	270 lm	4,6%
80-90°	127 lm	2,1%
90-100°	64 lm	1,1%
100-110°	58 lm	1,0%
110-120°	43 lm	0,7%
120-130°	35 lm	0,6%
130-140°	26 lm	0,4%
140-150°	17 lm	0,3%
150-160°	10 lm	0,2%
160-170°	5 lm	0,1%
170-180°	1 lm	0,0%
Total	5909 lm	100,0%

Intensity peaks

Max intensity	2394 cd
Intensity, 90°	74 cd
Intensity, 0°	2362 cd

Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	1951 lm	33,0%
0-40°	3071 lm	52,0%
0-60°	4769 lm	80,7%
60-90°	880 lm	14,9%
70-100°	460 lm	7,8%
90-120°	165 lm	2,8%
0-90°	5650 lm	95,6%
90-180°	259 lm	4,4%
0-180°	5909 lm	100,0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	973 lm	16,5%
Medium(30-60°)	1409 lm	23,8%
High(60-80°)	378 lm	6,4%
Very high(80-90°)	64 lm	1,1%
Back light		
Low(0-30°)	973 lm	16,5%
Medium(30-60°)	1409 lm	23,8%
High(60-80°)	378 lm	6,4%
Very high(80-90°)	64 lm	1,1%
Uplight		
Low(90-100°)	65 lm	1,1%
High(100-180°)	195 lm	3,3%

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B2 U3 G1

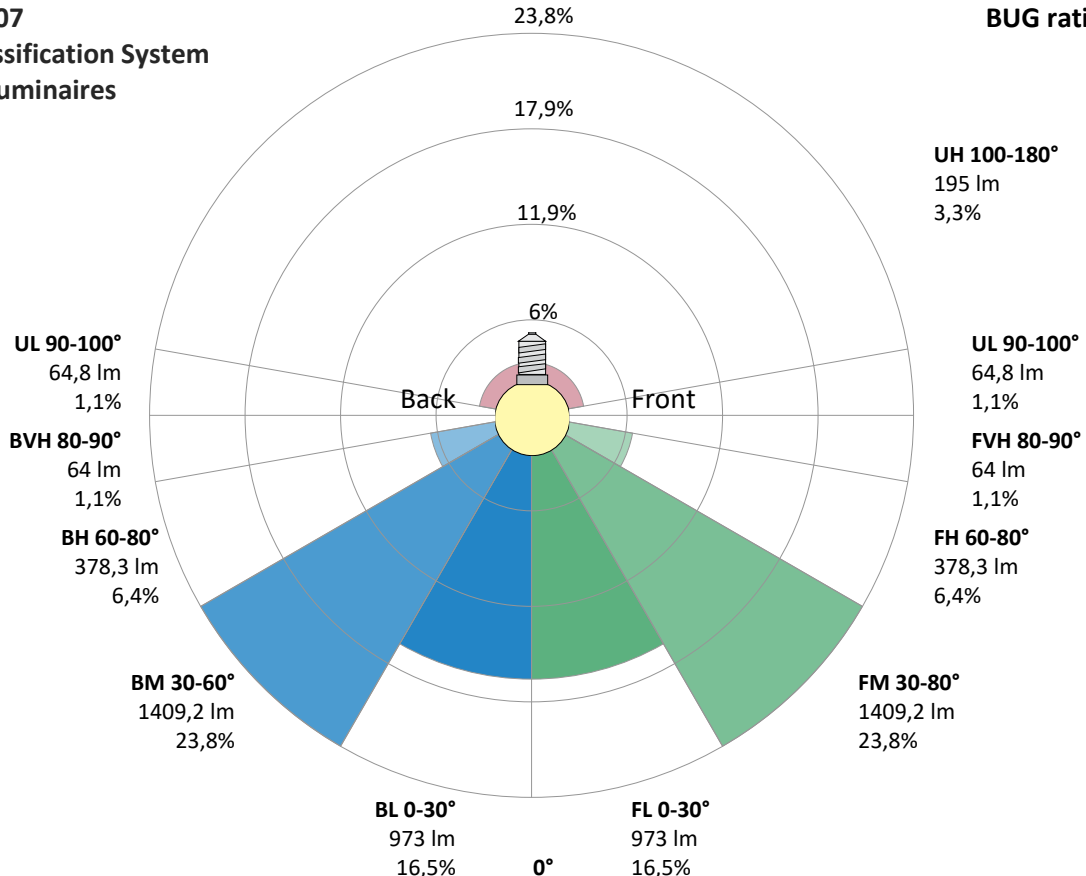

Light Measurement Report

Print date: 31-10-2025

Measurement date and time: 31-10-2025 08:32:33 – Measurement no. VFR-251031-3835-MS

Measurement tracking No. and Link: [VT251031-003988](#)

Operator:




Power Details


Input Power

Power feed to light source	39,4 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	230 V
RMS Input current feed, I_{RMS}	0,180 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	41,45 VA
Displacement factor of AC power feed	0,96
Power factor of AC current feed	0,95
Total harmonic distortion of the current	8,58%
Total harmonic distortion of the voltage	0,08%

Input Power Curve

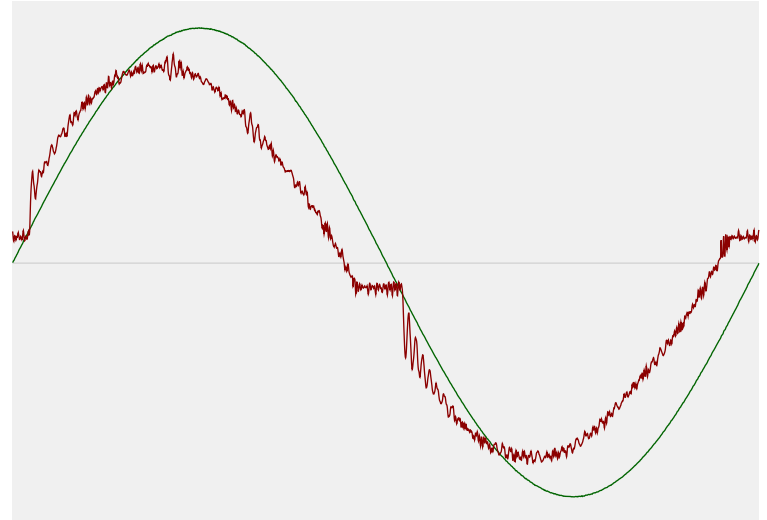

Efficiency

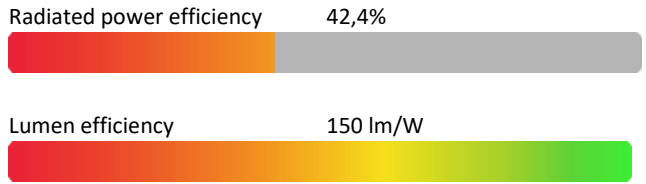

Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	4006 K
CCT shift	-6 K
CCT end	4000 K


Warmup Result

Total warmup time	Lamp stabilized in 15 min 1 sec
Warmup variation	-1,0%

Output Change

Output start	5967 lm
Output change	-58 lm
Output end	5909 lm

Stabilization Curve

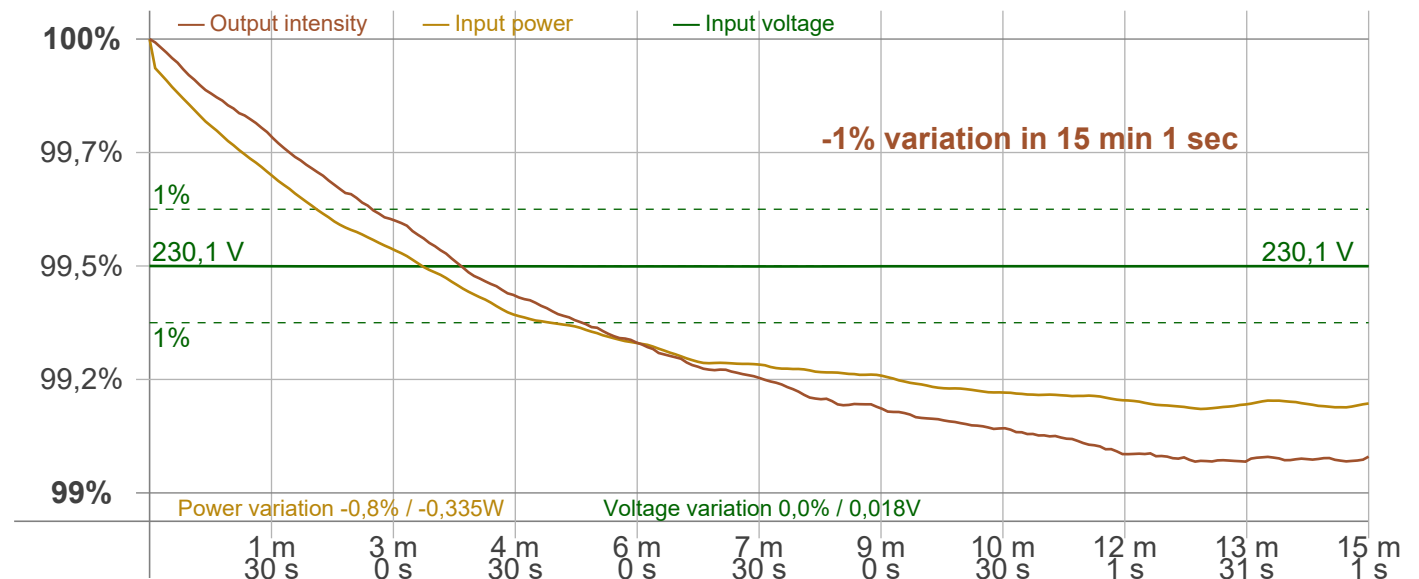

Light Measurement Report

Print date: 31-10-2025

Measurement date and time: 31-10-2025 08:32:33 – Measurement no. VFR-251031-3835-MS

Measurement tracking No. and Link: [VT251031-003988](#)

Operator:



Flicker /TLA details

Flicker Meter Type: Viso Systems LabFlicker
 Frequency of input power: 50 Hz
 Flicker/TLA sample rate: 20000 samples/s

Measurement time
 PstLM: 180 sec
 All other indices: 1,2 sec

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency: 99,5 Hz
 Percent Flicker: 0,31 %
 Flicker index: 0

Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz: 0,02 %
 JA8/10 90 Hz: 0,03 %
 JA8/10 200 Hz: 0,22 %
 JA8/10 400 Hz: 0,23 %
 JA8/10 1000 Hz: 0,27 %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value (F < 80 Hz): 0,02
 SVM value (80 < F < 2000 Hz): 0,01

Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp: 0,01

Flicker frame (frame of one flicker period in time domain)

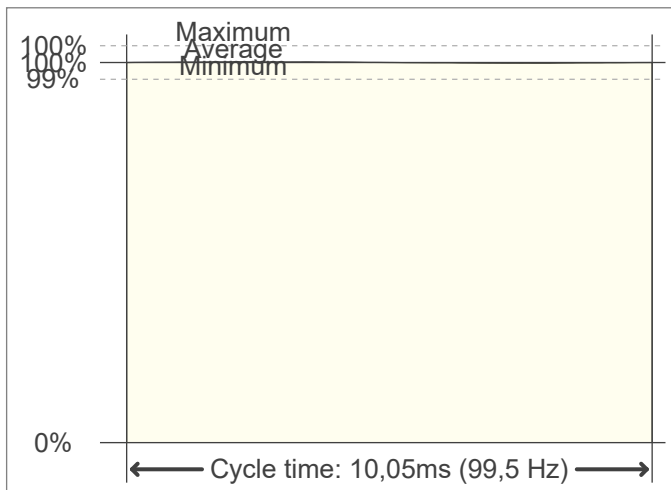

Flicker FFT (flicker curve in frequency domain)



IEEE 1789 Frequency/modulation plot

